



Evaluation of ADWI's: Agri-Drinking Water quality Indicators in three case studies

Authors: Birgitte Hansen, Hyojin Kim, Ingelise Møller, Abel Henriot, Marc Laurencelle, Tommy Dalgaard, Morten Graversgaard, Susanne Klages, Claudia Heidecke and Nicolas Surdyk

Date: 23.4.2021

Version: 1

Series:

This report was written in the context of the FAIRWAY project

www.fairway-project.eu



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 727984

DOCUMENT SUMMARY	
Project Information	
Project Title	Farm systems management and governance for producing good water quality for drinking water supplies
Project Acronym	FAIRWAY
Call identifier	H2020-RUR-2016-2
Topic	RUR-04-2016 Water farms – improving farming and its impact on the supply of drinking water
Grant agreement no	727984
Dates	2017-06-01 to 2021-05-31
Project duration	54 months
Website addresses	www.fairway-project.eu www.fairway-is.eu
Project coordination	Stichting Wageningen Research, NL
EU project representative & coordinator	Lara Congiu (REA)
Project scientific coordinator	Gerard Velthof
EU project officer	Gaetan Dubois (DG Agri)
Deliverable information	
Title	Agri-Drinking Water quality Indicators
Authors	Birgitte Hansen, Hyojin Kim, Ingelise Møller, Abel Henriot, Marc Laurencelle, Tommy Dalgaard, Morten Graversgaard, Susanne Klages, Claudia Heidecke and Nicolas Surdyk
Author email	bgh@geus.dk
Deliverable number	D3.2
Workpackage	WP3
WP Lead	Nicolas Surdyk
Type and dissemination level	Report and leaflet
Editor	Gerard Velthof
Due date	
Publication date	
Copyright	© FAIRWAY project and partners

[illegible]

CONTENTS

Executive Summary	2
1. Introduction	4
2. Selection of case studies	5
3. Selection of ADWI indicators	6
3.1 Nitrogen indicators.....	6
3.2 Pesticides indicators	7
3.3 The link indicator	7
4. Statistical analyses and results.....	8
4.1 Nitrogen indicators.....	8
4.2 Pesticides indicators	9
4.2.1 N surplus as a pressure indicator	10
4.2.2 Area of main crop type as a pressure indicator	10
4.2.3 Amounts of applied pesticides as a pressure indicator	11
5. Recommendations on ADWI indicators	11
5.1 Nitrogen indicators.....	11
5.2 Pesticide indicators.....	12
5.3 Link indicators.....	12
6. Dissemination to stakeholders	13
7. Conclusion	13
8. References	14
Appendix A: Scientific paper	16
Appendix B: Leaflet.....	17

EXECUTIVE SUMMARY

This report presents the work in task 3.2 of Fairway and constitutes the deliverable 3.2 comprising the report (main text), a scientific paper (appendix A), and a leaflet (appendix B) on evaluation of ADWI's: Agri-Drinking Water quality Indicators in three case studies related to the work of task 3.2 in Fairway.

The ADWIs are defined within the DPLSIR-framework including a new component called 'link'. The link indicator is developed to better explain the relationship between pressure from agriculture and state of water quality. The link can be assessed by the key indicator called lag time defined as the time between leaching from the agricultural system and the appearance of the chemical compound in the hydrogeological system in groundwater or surface water used for drinking water production (Kim *et al* 2020).

Selection of the indicators were based on an initial survey and data collection among all 13 case studies showing large heterogeneity in available data, and limitations for comparison studies (Klages *et al.*, 2018). Only three case studies, two in Denmark (Aalborg and Tunø) and one in France (La Voulzie) had sufficient data (i.e. long-term series of water quality in groundwater in combination with nitrogen (N) pressure indicators) for the deliverable 3.2 presented here. The 3 case studies cover a relative wide range of situations in Europe due to varying climate, abstraction volume, size of protected area, farming type, geology, and flow pathways. Results of the analyses of the nitrogen indicators are published in the scientific paper by Kim *et al.* (2020) in Appendix A.

Based on the analyses from the three case studies presented in this report, the agricultural N surplus pressure indicator is identified and reconfirmed as a suitable indicator as it is the most significant, prevalent, effective, and easy to use indicator regarding nitrate contamination of water. The nitrate leaching below the soil zone would be the most appropriate state indicator but is seldom collected because sampling equipment to measure leaching is very costly to install and to maintain for monitoring, and the results can be difficult to upscale. However, in this study, nitrate leaching data from pore water were available from Tunø, Denmark. This is an exceptional case and here we show how they can be used in combination with the N surplus and groundwater nitrate data. In general, the more abundant state indicator such as nitrate concentrations in groundwater is recommended as this is the standard state quality indicator.

Selecting directly appropriate pesticide indicators are much more difficult than for nitrogen due to the lack of long time series of both pesticide application pressure and pesticide concentration state data. In the specific case of La Voulzie, the analyses of the two other pressure indicators (area of main crop type and amount of application of pesticides) regarding pesticide contamination of groundwater were appropriate choices of indicators. These indicators are transparent and easy to use and to communicate to stakeholders. However, they cannot be abundant indicators because it is rare that a single pesticide product is used on all the agricultural fields having the same crop type in a catchment. Therefore, in some specific catchments with monotype conventional agriculture these two pressure indicators (area of main crop type and amount of application of pesticides) could be usable indicators of potential pesticide contamination. In the case of lack of direct appropriate pesticide pressure data, an attempt can be made by using N surplus as the pressure indicator of intensive agriculture and probable use of pesticides, as demonstrated in La Voulzie case study of France. It is suggested that the use of nitrogen fertilizers and pesticides is positively correlated.

The lag times estimated using the cross-correlation function method (CFF) were comparable to the water age estimated using the environmental tracers chlorofluorocarbons (CFC), but in general the lag times of nitrate were shorter than the water ages. For instance, for Tunø, the lag times estimated based on the CCF analysis were 5-11 years shorter than the water age measured using environmental tracer, CFCs. The difference might be small, but it may provide a valuable insight

into the mode of contaminant transport. The lag time may represent the shortest travel time that delivers the agricultural signal to the water sample collection point (only advective flow). In contrast, the groundwater age represents the mean residence time of the existing groundwater at the collection point. Therefore, knowledge on both groundwater age and lag time are important for protection of the aquatic environment notable including groundwater. In La Voulzie, the statistically significant lag times were comparable for nitrate and pesticides using the N surplus pressure indicator. The estimated lag times for nitrate were 14 and 24 years, and for pesticides the values were 15 and 20 years for the main and bottom spring respectively while for the top spring the lag times were higher for pesticides (20 yr) than nitrate (8 yr).

The focus of the leaflet in Appendix B is on disseminating the importance of linking agricultural impact and drinking water quality response by using examples from 3 case studies, two in Denmark and one in France. The leaflet stresses that a better understanding of the relationships between mitigation measures and drinking water quality is necessary to achieve a long-lasting efficient drinking water protection plan. The lag time and/or link between agricultural impact and drinking water quality response may be the most important information for a successful protection strategy. The link indicator is important for both communication of results to stakeholders and for the design of monitoring programs. The leaflet is meant to disseminate our findings in WP3 to relevant stakeholders e.g. farmers, waterworks, and authorities. In the leaflet several key take-home messages are formulated that could initiate a dialog with stakeholders.

Workshops with Multi-Actor Platforms were planned both in Denmark and in France for presentations and discussions in 2020 but are postponed to 2021 due to the COVID-19 situation. A presentation on lag-time, using the WP3 results, was given in the framework of the new CAP web-conference in November 2020 (<https://www.fairway-project.eu/index.php/news-events/145-march-2021-new-cap-an-opportunity-for-water-policies>). The purpose of the presentation was highlighting the importance of coherency and consistency in agri-environmental measures since in some hydrological context, only long-term coherent policies will produce sufficient effects. Overwhelming short-term measures will not produce effect in a short time range. In addition, inconsistent policies (i.e. subsidies of mitigation measures change every five years) may not produce significant effect. Concerning the stakeholder involvement and indicators setting, passive samplers were given by the French BRGM to the water company to both involve local stakeholders in monitoring and for improving the water quality monitoring by adding an integrative sampling to punctual sampling. With this new sampling technique, the water company wants to better understand pesticide bypass transfers in some springs and eventually monitor more sites including surface water. In this process, farmers could be directly involved.

1. INTRODUCTION

The present report is written as part of Work Package 3 (WP3) entitled *Monitoring and Indicators* of the FAIRWAY project. The main objective of WP3 is identifying, selecting and prioritizing transparent and data-driven indicators for monitoring of the impacts of agriculture activities on drinking water quality, referred as Agri-Drinking Water Indicators (ADWIs). ADWIs are intended to assist agricultural consultancy, therefore, they should be appealing and understandable for farmers. On a larger scale, ADWIs are intended to support central and local administration and policymakers, water companies in analysing the situation of diffuse pollution and selecting measures to protect drinking water resources.

The ADWIs are defined within the DPSIR-framework. The DPSIR is one of the most widely used conceptual framework to explain the cause and effect relationships between the society and environment (Smeets and Weterings 1999). The DPSIR describes the feedbacks among social and economic developments including: driving forces (D), pressures (P) on the environment, the state (S) of the environment changes, impacts (I) on ecosystems, and human health and society and a societal response (R) (Smeets and Weterings 1999).

However, under the DPSIR framework there is no component to explain the relationships between pressure and state that may be highly variable from site to site. Therefore, WP3 of Fairway has developed a new component called 'link' to the DPSIR framework to better explain the relationships between pressure and state. The new framework is then called DPLSIR (Figure 1). The link component between agricultural pressure and drinking water quality state can be assessed by the key indicator called lag time. Lag time is defined as the time between leaching of nitrate from the agricultural system and the appearance of nitrate in the hydrogeological system in groundwater or surface water used for drinking water production (Kim *et al* 2020).

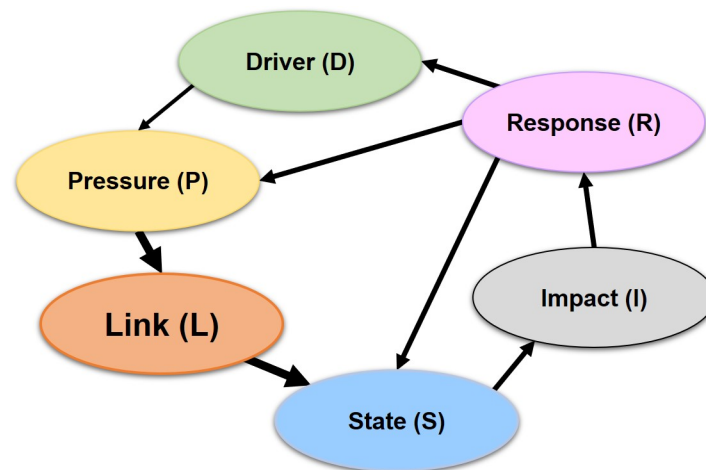


Figure 1. DPLSIR framework. The DPLSIR framework is comprised of driving forces (D), pressures (P) on the environment, the link (L) between pressure and state, the state (S) of environmental changes, impacts (I) on ecosystems and human health and society, and a societal response (R; Kim *et al.*, 2020).

Figure 2 shows the three different deliverables of WP3. The first report (Deliverable 3.1) from WP3 contained the results of the first step of the ADWIs development, and have the title “*Review report of Agri-Drinking Water quality Indicators and IT/sensor techniques, on farm level, study site and drinking water source*”. The report consists of a literature review, expert and database consultation. It also contains a preliminary selection of indicators.

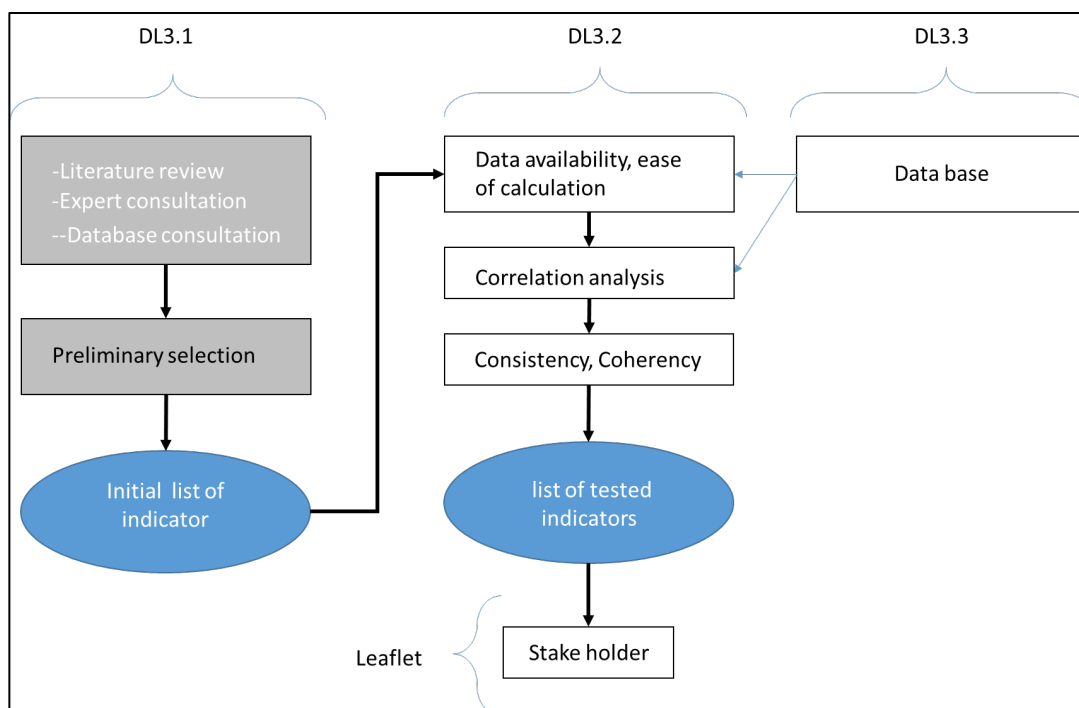


Figure 2: The content of and the connection between the three different deliverables (DL) in WP3.

This document (DL3.2) is the second report in WP3 and contains the results of the next step of the ADWIs development. It is based on statistical analyses of available data from 3 out of the 13 case studies in Fairway. The report contains descriptions of the selection of case studies (Chapter 2), selection of ADWI indicators (Chapter 3), presentation of the statistical analyses and results for nitrate and pesticides (Chapter 4 & Appendix A), recommendations on ADWI indicators (Chapter 5), description of dissemination to stakeholders (Chapter 6), and a conclusion (Chapter 7). The leaflet in Appendix B is part of the communication strategy to stakeholders described in Chapter 6 and is related to the work of WP2 on Multi-Actor platforms and case studies.

The task of the present deliverable 3.2 links to that of the next deliverable 3.3, which is development of a harmonized database. Part of the work for deliverable 3.3 will include efforts to collect data from more of the case studies in Fairway.

This document constitutes the Deliverable 3.2 (D3.2) including a report and a leaflet entitled: *Evaluation of ADWI's: Agri-Drinking Water quality Indicators in three case studies* related to the work of task 3.2.

2. SELECTION OF CASE STUDIES

In Fairway 13 case studies from 11 countries are analysed in different tasks in the project. According to the project description of the case studies in FAIRWAY there is a different degree of contribution of the case studies to the different WP's.

An initial survey and data collection among all 13 case studies showed large heterogeneity in the available data, and limitations in possibilities for comparison studies (Klages et al., 2018). This was either due to lacking pressure data, limited availability of impact, state and link indicators data, or due to different scales of data (plot, farm, regional or larger) as presented in the first report of WP3 by Klages et al. (2018).

Another limiting factor for availability of data was related to protection of personal data enforced by the new (May 2019) General Data Protection Regulation (GDPR) of EU. In some case studies, the

GDPR made it difficult and complicated to get access especially to farm data in this context called driving force and pressure ADWI data.

Fairway aims at developing a set of “...*quick and direct indicators...which allow farmers to be actors in the environmental impact at farm level.*”. To fulfill this objective, the first stage of the data collection was to gather ‘farm level’ data or the most detailed data as possible. The criteria for the data collections were:

- Long-time series of both pressure and state data (>20 years)
- Agricultural data *at farm level* or *at least catchment level* for driving force and pressure indicators
- Direct measurement of water chemistry of any types of water in the area (soil pore water, groundwater and streams) for state indicators
- Water age data (e.g. tracer test, water dating) for link indicators.

Farm level data for driving force and pressure indicators could be collected only in three case study sites: two in Denmark and one in France. The 3 case studies cover a relative wide range of situations in Europe as the sites vary regarding climate, abstraction volume, size of protected area, farming type, geology, and flow pathways. Only these 3 case studies had sufficient data for the analysis in task 3.2.

3. SELECTION OF ADWI INDICATORS

The first report from WP3 (Klages et al., 2018) consisted of an overview of the most promising ADWIs from a survey among all case studies in FAIRWAY. The ADWIs were selected by 1) reviewing and identifying relevant pre-existing indicators such as e.g. Agri-Environmental Indicators of the European Commission for instance, and 2) quantitatively and conceptually evaluating the identified indicators using compiled data from the case studies.

It was deduced that the indicators from the agricultural sector acting as Driving forces and as Pressure indicators were far more numerous than State and Impact indicators from the water sector. The large number of agricultural Driving forces and Pressure ADWIs (land use, climatic conditions, soil properties, farming types, farm management, N-fertilization, pesticide application etc.) also explained that from this part of the DPSLIR-model many factors may influence water quality. On the other hand, water-quality State indicators are far more standardised for monitoring.

3.1 NITROGEN INDICATORS

The choice of nitrogen indicators is presented in Appendix A in the scientific paper by Kim et al (2020), and is summarized in Table 1.

N surplus is chosen as the pressure indicator, lag time as the link indicator and annual average concentrations of nitrate in soil pore water below the root zone, groundwater, or stream water as the state indicator.

Pressure indicator (kg N/ha/year)	Link indicator (year)	State Indicators (mg/L)
<ul style="list-style-type: none"> • N surplus 	<ul style="list-style-type: none"> • Lag time 	<ul style="list-style-type: none"> • Annual average concentrations of NO₃⁻ in soil-pore water/ groundwater/ stream water

Table 1. Selected ADWI nitrogen indicators

3.2 PESTICIDES INDICATORS

Unlike nitrogen, time-series of the pesticide inputs was not available. Thus, we hypothesized that the N-fertilizer usage, and the area of main crop type may positively correlate to pesticide usage. Therefore, we evaluated the applicability of the following indirect indicators as a pesticides pressure indicator: 1) N surplus, 2) area of main crop type, and 3) total amount of pesticides applied (see Table 2).

The pesticide state indicators that were assessed are the annual average of the pesticide concentrations above the detection limit, the annual average of the sum of pesticide concentrations above the detection limit and the annual average number of pesticides above the detection limit.

Pressure indicator	Link indicator (year)	State Indicators (µg/L)
<ul style="list-style-type: none"> N surplus Area of main crop type Application of pesticides 	<ul style="list-style-type: none"> Lag time 	<ul style="list-style-type: none"> Annual average of concentrations above detections limit in water Annual average of sum of all the concentrations above detections limit in water Annual average number of substances of pesticide in water

Table 2. Selected ADWI pesticides indicators.

3.3 THE LINK INDICATOR

In this report we have decided to use a statistical method to connect or link the ADWIs from the agricultural and water sector by calculating a lag time. The calculated lag time is compared to direct measurement of water ages with dating methods in the two case studies in Denmark with available data.

The lag time between soil surface N surplus (x) and annual average concentrations of nitrate in water (y) was calculated using the cross-correlation function (CCF) with a correlation coefficient function of Matlab. The CCF method assumes a linear dependency between the two variables soil N surplus and nitrate concentrations and the calculated lag time is the time difference between a soil surface N surplus peak and a nitrate concentration peak. The lag times were calculated for a range of time lags (k; year). For example, a correlation between x at time t and y at time t+k was calculated. The range of k was from 0 year and 50 years. The CCF provides two main results for every lag k: 1) the strength of the correlations between x and y (correlation coefficient; r), and 2) the significance of the correlation (p-value). The strength of the correlation varied between 0 (no correlation) and ± 1 (strong positive or negative correlation). The k (in years) giving the highest and statistically significant r was defined as the lag time.

Lag times not only quantify the delay between the pressure stress and state response, but also reveal primary pathways of water and contaminants (Koh *et al* 2018). To recharge groundwater, water primarily flows vertically via matrix flow pathways and/or preferential flow pathways (Figure 2). This water eventually emerges in the surface water. Matrix flow is a pathway through pore spaces in the soil matrix. The lag times of matrix flow can be long (years to decades). Preferential flow is a pathway via macro-pores in soils and fractures in bedrock, bypassing a dense or less

permeable matrix (Beven and Germann 1982, Hendrickx and Flury 2001). The macro porous spaces in soils can be created along root channels, soil fauna channels, cracks (i.e., freeze-thaw and wetting-drying), fissure, or soil pipes (Beven and Germann 1982). Preferential flow may be transiently active; however, it can deliver a significant quantity of contaminants with a very short time delay (hours~weeks) (Rosenbom *et al* 2009, 2008). Therefore, the groundwater table and groundwater chemistry of matrix-flow-dominated systems will exhibit relatively small variations and slow changes over time compared to those of preferential-flow-dominated systems.

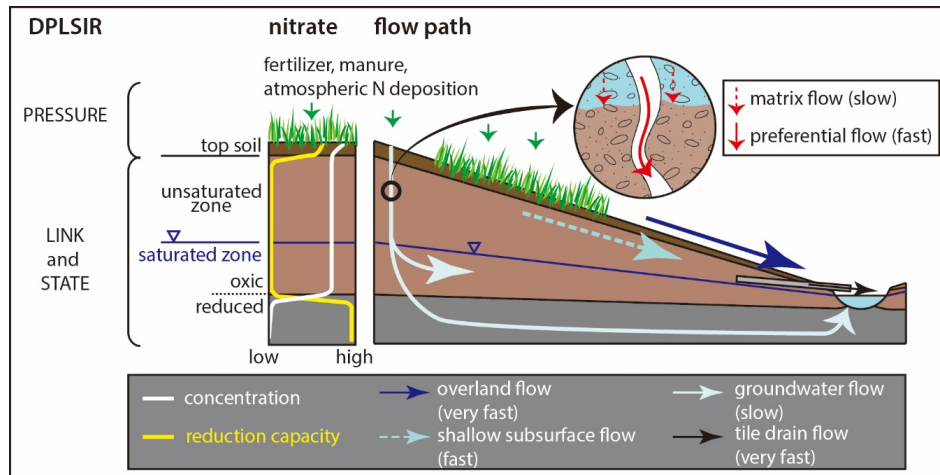


Figure 2. Conceptual understanding of the vertical distribution of nitrate from the agricultural system to the hydrogeological system and pathways in the hydrogeological system. The agricultural system is represented by the pressure indicators and the hydrogeological system is described by the link and state indicators. The reduction capacity is defined as the sum of solid nitrate-reducing compounds, e.g., pyrite and organic matter.

4. STATISTICAL ANALYSES AND RESULTS

4.1 NITROGEN INDICATORS

The statistical analyses and results from the three case sites regarding nitrogen is presented in Appendix A in the scientific paper by Kim *et al* (2020).

At these sites, various mitigation measures have been implemented since the 1980s at local to national scales, resulting in a decrease of soil surface N surplus, with long-term nitrate monitoring data also being available to reveal the water quality responses. The lag times continuously increased with an increasing distance from the N source in Tunø (from 0 to 20 years between 1.2 and 24 m below the land surface; mbls) and La Voulzie (from 8 to 24 years along downstream), while in Aalborg-Drastrup, the lag times showed a greater variability with depth—for instance, 23-year lag time at 9–17 mbls and 4-year lag time at 21–23 mbls.

These spatial patterns were interpreted, finding that in Tunø and La Voulzie, matrix flow is the dominant pathway of nitrate, whereas in Aalborg-Drastrup, both matrix and fracture flows are important pathways. The lag times estimated in at the two sites in Denmark were comparable to groundwater ages measured by chlorofluorocarbons (CFCs); however, they may provide different information to the stakeholders. The lag time may indicate a wait time for detecting the effects of an implemented protection plan while groundwater age, which is the mean residence time of a water body that is a mixture of significantly different ages, may be useful for planning the time

scale of water protection programs. We conclude that the lag time may be a useful indicator to reveal the hydrogeological links between the agricultural pressure and water quality state, which is fundamental for a successful implementation of drinking water protection plans.

4.2 PESTICIDES INDICATORS

The statistical analyses and results regarding pesticides are presented here.

In the first case study in the island Tunø, Denmark, pesticides have been monitored since the 1990s for up to 28 compounds; however, none of them have been detected over the monitoring period (Figure 3.a).

In the second case study site in Aalborg-Kongshøj, Denmark, at the beginning of the monitoring period, 5-6 compounds were measured, and it increased up to 31 compounds in 2010 (Figure 3.b). Pesticides were either not detected (16/34 monitoring points) or ranged at very low concentrations sporadically ($<0.03 \mu\text{g/L}$ in 13/34 monitoring points; Figure 3.b).

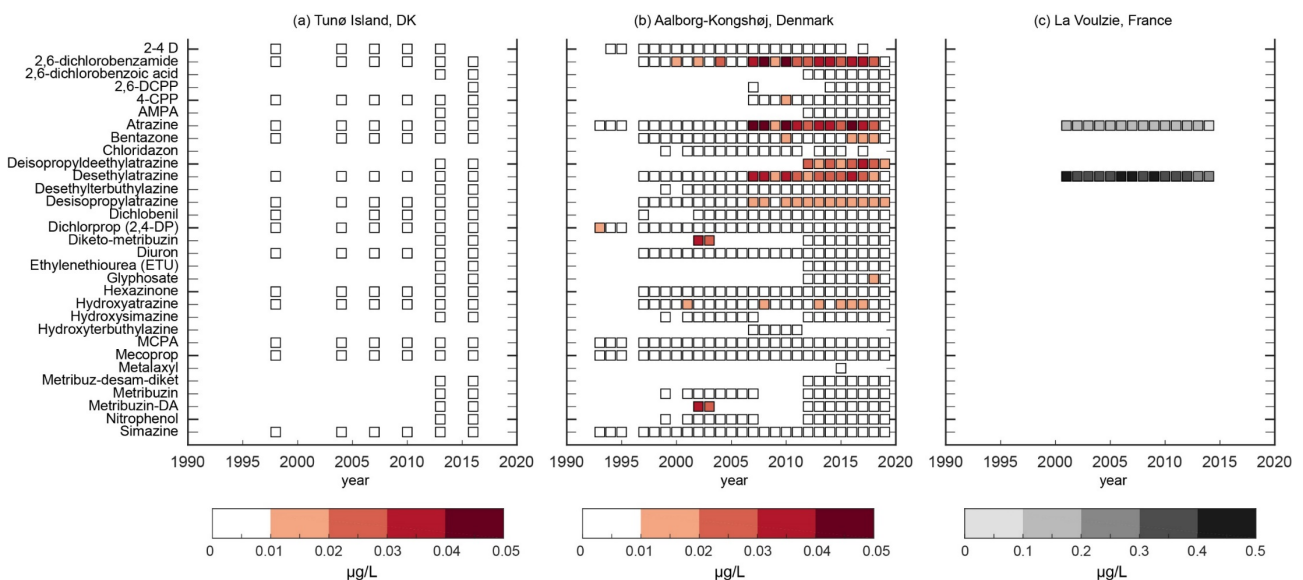


Figure 3. Time-series of annual average concentrations of pesticides of (a) Tunø Island, (b) Aalborg-Kongshøj, and (c) La Voulzie by analysed compounds.

In La Voulzie catchment, France, atrazine is the main concern (Figure 3.c). This compound had been predominantly used in maize field. Use of atrazine has been banned since 2003. The pesticides monitoring has begun in 2001, and has been focusing on atrazine and its metabolite, desethylatrazine (DEA). Both compounds show decreasing trends: atrazine ($0.1\text{-}0.2 \mu\text{g/L}$ to $0\text{-}0.1 \mu\text{g/L}$) and DEA ($0.3\text{-}0.6 \mu\text{g/L}$ to $0.1\text{-}0.4 \mu\text{g/L}$) over the monitoring period. The trends and the percentage of maize fields are shown in Figure 4, since atrazine was exclusively used in maize field.

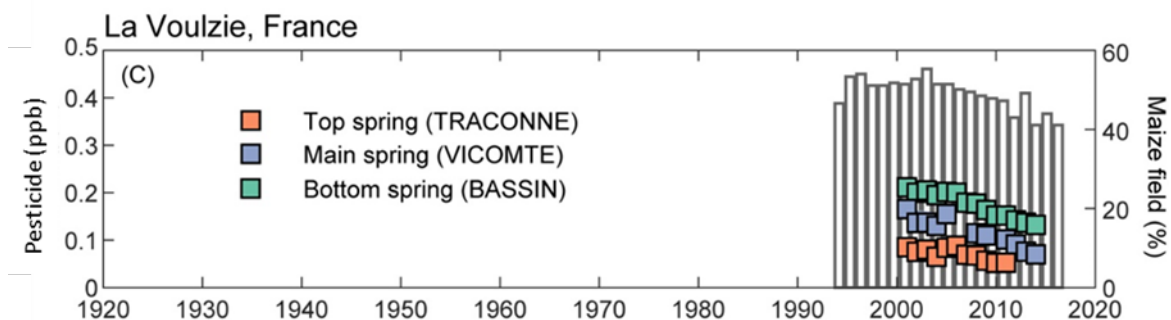


Figure 4. Time-series of annual average concentrations of pesticide (atrazine +desethylatrazine) above 0.01 ppb in La Voulzie. The % area of maize fields is shown as vertical bars.

The relatively low impact of pesticides on the groundwater quality in the two Danish case studies makes further analyses of those indicators impossible. Therefore, the further analyses of pesticide indicators could be done only with data from La Voulzie in France because of the high impact of pesticides on the water quality, and their relatively high concentrations.

4.2.1 N surplus as a pressure indicator

Unlike the nitrogen case, a time-series of the pesticide inputs are rarely available. Therefore, we tested the N surplus indicator to evaluate its applicability as a pesticides pressure indicator.

In La Voulzie case study, the N surplus indicator and the annual average concentrations of atrazine showed statistically significant correlations using the CCF method. For the top and the bottom springs, the correlations were strong (0.85 for top and 0.83 for bottom springs) and statistically significant, and the estimated lag time was 20 year (Table 3). For the main spring, the correlation was 0.75 and the lag time is 15 years.

Sampling points	N surplus
	Lag year (correlation coefficient)
Top spring with annual average concentrations	20 (0.85)**
Main spring with annual average concentrations	15 (0.75)**
Bottom spring with annual average concentrations	20 (0.83)**

Table 1 : Pesticide lag time (yr) estimation using N surplus pressure indicator in La Voulzie, France. Statistically significant at * $p < 0.05$; ** $p < 0.005$.

4.2.2 Area of main crop type as a pressure indicator

In La Voulzie case study, the correlation between maize crop area and the atrazine concentrations in the main and bottom springs were 0.71 and 0.74, respectively, and both were statistically significant. The lag time for both springs were 10 years. For top spring, a shorter lag time was estimated but the result was statistically insignificant (Table 4).

In Derg Catchment (case study no. 7) in France a similar relationship was found between the area of main crop type and the application amounts of a specific pesticide. In this case the pesticide was MCPA and the area of main crop type was improved grassland infested by rush (Morton et al, 2021).

Sampling points	Lag year (correlation coefficient)
Top spring with annual average concentrations	7 (0.49)
Main spring with annual average concentrations	10 (0.71)*
Bottom spring with annual average concentrations	10 (0.74)*

Table 2 : Pesticide lag time (yr) estimation using area of main crop type indicator in La Voulzie, France. Statistically significant at * $p < 0.05$; ** $p < 0.005$.

4.2.3 Amounts of applied pesticides as a pressure indicator

In La Voulzie case study, the applied amount of the pesticide atrazine is compared to the concentrations of atrazine in groundwater using the CCF method. The applied amount of pesticide is calculated by multiplying the recommended-application-rate for atrazine by the total area of maize fields in the study area. A highly significant correlation was found between the pressure indicator and the status indicator (Figure 5 and Table 5) indicating a lag time of 22-27 years. Thus, in the specific case of La Voulzie, the atrazine contamination of groundwater can directly be linked to the application of atrazine on the maize fields in the catchment.

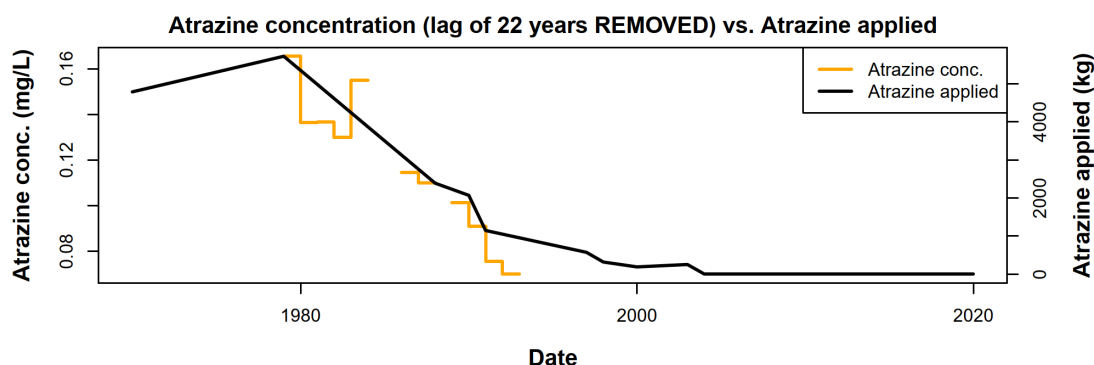


Figure 5. Top spring: CFF analysis for atrazine obtained ($r = 0.94^{**}$), after removing the lag time of +22 years from the atrazine time series in La Voulzie, France.

Sampling points	Lag year (correlation coefficient)
Top spring with annual average concentrations	22 (0.94)**
Bottom spring with annual average concentrations	27 (0.85)**

Table 3 : Pesticide lag time (yr) estimation using application of pesticide indicator in La Voulzie, France. Statistically significant at * $p < 0.05$; ** $p < 0.005$.

5. RECOMMENDATIONS ON ADWI INDICATORS

5.1 NITROGEN INDICATORS

Based on the analyses from the three case studies presented in this report, the agricultural N surplus pressure indicator is identified and reconfirmed as a suitable indicator as it is the most significant, prevalent, effective, and easy to use indicator regarding nitrate contamination of water.

Measured nitrate leaching below the soil zone would be the most appropriate state indicator but is seldom collected because sampling equipment to measure leaching is very costly to install and to maintain for monitoring, and the results can be difficult to upscale. However, in this study nitrate leaching data from pore water were available from Tunø, Denmark. This is an exceptional case and here we show how they can be used in combination with the N surplus and groundwater nitrate data. In general, the more abundant state indicator such as nitrate concentrations in groundwater is recommended as this is the standard state quality indicator.

However, it is important to adjust the choice of the nitrogen indicators to the purpose and scale of the study.

First, for the evaluation of the effect of mitigation measure at the farm scale, the nitrate concentrations of soil pore water right below the topsoil (rooting zone) is recommended. This indicator has the shortest lag time; therefore, the effect of the implemented mitigation measure can be seen almost immediately (within 1 year). However, it only represents the condition at the very locally collection point. Thus, monitoring at multiple points in the area is recommended.

Second, for the evaluation of the mitigation measures at the catchment scale, the nitrate concentration in oxic groundwater is recommended. In nitrate-reducing or reduced groundwater, nitrate concentrations will be affected by the natural processes, and therefore, the effect of mitigation measures cannot be clearly seen. The groundwater chemistry integrates the effects within its recharging area; however, groundwater should be monitored at multiple locations to increase the representativeness of the data.

Third, the annual average concentration of nitrate in groundwater is recommended to monitor the status of the water quality. Both the groundwater and drinking water standards for nitrate are 50 mg/L. The sampling frequency per year may vary depending on the hydrogeological settings and lag time. If the lag time is relative long, then a sampling frequency of once every year or up to every 2-3 years may be acceptable. On the other hand, relatively short lag times will require more frequent sampling as in the case study of Aalborg in Denmark where there is preferential flow in macro pores.

5.2 PESTICIDE INDICATORS

Selecting directly appropriate pesticide indicators is much more difficult than for nitrogen due to the lack of long time series of both pesticide application amounts (pressure) and pesticides concentrations in water (state).

In the specific case of La Voulzie, the analyses of the two other pressure indicators (area of main crop type and amount of application of pesticides) regarding pesticide contamination of groundwater were appropriate choices of indicators. These indicators are transparent and easy to use and communicate to stakeholders. However, they cannot be abundant indicators because it is rare that a single pesticide product is used on all the agricultural fields having the same crop type in a catchment. Therefore, in some specific catchments with monotype conventional agriculture these two pressure indicators (area of main crop type and amount of application of pesticides) could be indicators of potential pesticide contamination.

In the case of lack of direct appropriate pesticide pressure data, an attempt can be made by using N surplus as the pressure indicator of intensive agriculture and probable use of pesticides as demonstrated in La Voulzie study site of France. In La Voulzie, the lag time analysis showed statistically significant results. However, the statistical significance does not necessarily indicate scientific robustness of these estimates. In La Voulzie, the fertilizer reduction program and atrazine ban were implemented in the last two decades. In this case the N surplus indicator could be used also as a pesticide pressure indicator because nitrate and atrazine follow a similar trend during the intensification of agriculture.

5.3 LINK INDICATORS

At the two Danish sites, the lag times of nitrate estimated using the CCF analysis were comparable to the water ages estimated using environmental tracers (CFCs), but in general the lag times were shorter than the water ages. For instance, for Tunø, the lag times estimated based on the CCF analysis were 5-11 years shorter than the water age measured using environmental tracer, CFCs. The difference might be small, but it may provide a valuable insight into the mode of contaminant transport.

The lag time may represent the shortest travel time that delivers the agricultural signal to the water sample collection point (advective flow only). In contrast, the groundwater age represents the mean residence time of the existing groundwater at the collection point. It is well known that groundwater even at a narrow sampling interval is a mixture of a wide range of ages (Weissmann *et al* 2002, Goddy *et al* 2006). These data imply that water can be contaminated rapidly with a long residual contamination, and thus it may take a longer time to remediate it. The lag time mainly represents the signal propagation through the fast route while the groundwater age represents the average of both fast and slow route.

In La Voulzie, the statistically significant lag times were comparable for nitrate and pesticides using the N surplus pressure indicator. The estimated lag times for nitrate were 14 and 24 years, and for pesticides the values were 15 and 20 years for the main and bottom spring respectively while for the top spring the lag times were higher for pesticides (20 yr) than nitrate (8 yr).

6. DISSEMINATION TO STAKEHOLDERS

The focus of the leaflet in Appendix A is on disseminating the importance of linking agricultural impact and drinking water quality response by using examples from our 3 case studies in Denmark and France. The leaflet stresses that a better understanding of the relationships between mitigation measures and drinking water quality is necessary to achieve a long-lasting efficient drinking water protection plan. The lag time and/or link between agricultural impact and drinking water quality response may be the most important information for a successful protection strategy. The link indicator is important for both communication of results to stakeholders and for the design of monitoring programs.

The leaflet is meant to disseminate our findings in WP3 to relevant stakeholders e.g. farmers, waterworks, and authorities. In the leaflet, several key take-home messages are formulated that could initiate a dialog with stakeholders. Workshops with Multi-Actor Platforms were planned both in Denmark and in France for presentations and discussions in 2020 but are postponed to 2021 due to the COVID-19 situation.

A presentation on lag-time, using the WP3 results, was given in the framework of the new CAP web-conference in November 2020 (<https://www.fairway-project.eu/index.php/news-events/145-march-2021-new-cap-an-opportunity-for-water-policies>). The purpose of the presentation was highlighting the importance of coherency and consistency in farming measures since in some hydrological context, only long-term coherent policies will produce sufficient effects. Overwhelming short-term measures will not produce effect in a short time range. In addition, inconsistent policies (i.e. subsidies of mitigation measures change every five years) may not produce significant effect.

Concerning the Stakeholder involvement and indicators setting, passive samplers were given by the French BRGM to the water company to both involve local stakeholders in monitoring and for improving the water quality monitoring by adding an integrative sampling to punctual sampling. With this new sampling technique, the water company want to understand pesticide bypass transfers in some springs and eventually monitor more sites including surface water. In this process, more farmers could be directly involved.

7. CONCLUSION

In this document (deliverable 3.2) we present a report (main text) including a scientific paper (appendix A) and a leaflet (appendix B) on evaluation of ADWI's: Agri-Drinking Water quality Indicators in three case studies related to the work of task 3.2 in Fairway.

The ADWIs are defined within the DPLSIR-framework including a new component called 'link'. The link indicator is developed to better explain the relationship between pressure from agriculture and state of water quality. The link can be assessed by the key indicator called lag time defined as the time between leaching from the agricultural system and the appearance of the chemical compound in the hydrogeological system in groundwater or surface water used for drinking water production (Kim *et al* 2020).

Recommendations for appropriate nitrogen and pesticide pressure and state indicators are based on available data from the 3 case studies in Denmark and France. Selection of the indicators were based on an initial survey and data collection among all 13 case studies showing large heterogeneity in terms of data availability, and limitations in possibilities for comparison studies (Klages *et al.*, 2018). Only the 3 case studies had sufficient data for the deliverable 3.2 presented here. The results of the analyses of the nitrogen indicators are published in the scientific paper by Kim *et al.* (2020) in Appendix A.

The results and recommendations have been synthesised in a leaflet (Appendix B) meant to be used for dissemination to stakeholders

The presented work links to the next deliverable 3.3 where a harmonized database from all 13 case studies are under development. This next task are trying to collect data from more case studies than the three presented here to try to gather knowledge about the crucial and important link indicator in more areas of Europe. This knowledge is important for when the policies (WFD, CAP) are fully implemented in a member state of European Union.

8. REFERENCES






- Beven K and Germann P 1982 Macropores and water flow in soils *Water Resources Research* **18** 1311–25 Online: <https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1029/WR018i005p01311>
- Goody D C, Darling W G, Abesser C and Lapworth D J 2006 Using chlorofluorocarbons (CFCs) and sulphur hexafluoride (SF₆) to characterise groundwater movement and residence time in a lowland Chalk catchment *Journal of Hydrology*
- Hendrickx J M H and Flury M 2001 Uniform and preferential flow mechanisms in the vadose zone *Conceptual models of flow and transport in the fractured vadose zone* (Washington, D.C.: National Academies Press) pp 149–87
- Kim H, Surdyk N, Møller I, Graversgaard M, Blicher-mathiesen G, Henriot A, Dalgaard T and Hansen B 2020 Lag Time as an Indicator of the Link between Quality State *Water*
- Klages, S., Surdyk, N., Christophoridis, C., Hansen, B., Heidecke, C., Henriot, A., Kim, H., and Schimmelpennig, S., 2018. Review report of Agri-Drinking Water quality Indicators and IT/sensor techniques, on farm level, study site and drinking water source. Fairway report.
- Koh E-H, Lee E, Kaown D, Green C T, Koh D-C, Lee K-K and Lee S H 2018 Comparison of groundwater age models for assessing nitrate loading, transport pathways, and management options in a complex aquifer system *Hydrological Processes* **32** 923–38
- Rosenbom A E, Ernsten V, Flühler H, Jensen K H, Refsgaard J C and Wydler H 2008 Fluorescence Imaging Applied to Tracer Distributions in Variably Saturated Fractured Clayey Till *Journal of Environmental Quality* **37** 448–58

- Rosenbom A E, Therrien R, Refsgaard J C, Jensen K H, Ernstsen V and Klint K E S 2009 Numerical analysis of water and solute transport in variably-saturated fractured clayey till *Journal of Contaminant Hydrology* **104** 137–52
- Smeets E and Weterings R 1999 *Environmental indicators: typology and overview. Technical report No. 25.* (Copenhagen)
- Weissmann G S, Zhang Y, LaBolle E M and Fogg G E 2002 Dispersion of groundwater age in an alluvial aquifer system *Water Resources Research* **38** Online: <http://doi.wiley.com/10.1029/2001WR000907>

APPENDIX A: SCIENTIFIC PAPER

Article

Lag Time as an Indicator of the Link between Agricultural Pressure and Drinking Water Quality State

Hyojin Kim ^{1,*}, Nicolas Surdyk ², Ingelise Møller ¹, Morten Graversgaard ³,
Gitte Blicher-Mathiesen ⁴, Abel Henriot ², Tommy Dalgaard ³ and Birgitte Hansen ¹

¹ Department of Quaternary and Groundwater Mapping, Geological Survey of Denmark and Greenland (GEUS), C.F. Møllers Allé 8, Building 1110, 8000 Aarhus C, Denmark; ilm@geus.dk (I.M.); bgh@geus.dk (B.H.)

² BRGM, 3, avenue C. Guillemin, BP 360009, 45060 Orléans CEDEX 2, France; n.surdyk@brgm.fr (N.S.); a.henriot@brgm.fr (A.H.)

³ Department of Agroecology, Aarhus University, Blichers Alle 20, 8830 Tjele, Denmark; morten.graversgaard@agro.au.dk (M.G.); tommy.dalgaard@agro.au.dk (T.D.)

⁴ Department of Bioscience, Aarhus University, Vejlsovej 25, 8600 Silkeborg, Denmark; gbm@bios.au.dk

* Correspondence: hk@geus.dk

Received: 14 July 2020; Accepted: 19 August 2020; Published: 25 August 2020



Abstract: Diffuse nitrogen (N) pollution from agriculture in groundwater and surface water is a major challenge in terms of meeting drinking water targets in many parts of Europe. A bottom-up approach involving local stakeholders may be more effective than national- or European-level approaches for addressing local drinking water issues. Common understanding of the causal relationship between agricultural pressure and water quality state, e.g., nitrate pollution among the stakeholders, is necessary to define realistic goals of drinking water protection plans and to motivate the stakeholders; however, it is often challenging to obtain. Therefore, to link agricultural pressure and water quality state, we analyzed lag times between soil surface N surplus and groundwater chemistry using a cross correlation analysis method of three case study sites with groundwater-based drinking water abstraction: Tunø and Aalborg-Drastrup in Denmark and La Voulzie in France. At these sites, various mitigation measures have been implemented since the 1980s at local to national scales, resulting in a decrease of soil surface N surplus, with long-term monitoring data also being available to reveal the water quality responses. The lag times continuously increased with an increasing distance from the N source in Tunø (from 0 to 20 years between 1.2 and 24 m below the land surface; mbls) and La Voulzie (from 8 to 24 years along downstream), while in Aalborg-Drastrup, the lag times showed a greater variability with depth—for instance, 23-year lag time at 9–17 mbls and 4-year lag time at 21–23 mbls. These spatial patterns were interpreted, finding that in Tunø and La Voulzie, matrix flow is the dominant pathway of nitrate, whereas in Aalborg-Drastrup, both matrix and fracture flows are important pathways. The lag times estimated in this study were comparable to groundwater ages measured by chlorofluorocarbons (CFCs); however, they may provide different information to the stakeholders. The lag time may indicate a wait time for detecting the effects of an implemented protection plan while groundwater age, which is the mean residence time of a water body that is a mixture of significantly different ages, may be useful for planning the time scale of water protection programs. We conclude that the lag time may be a useful indicator to reveal the hydrogeological links between the agricultural pressure and water quality state, which is fundamental for a successful implementation of drinking water protection plans.

Keywords: lag times; link indicator; nitrate; agriculture; drinking water; DPLSIR framework

1. Introduction

The leaching of nitrate from intensive agricultural areas is one of the greatest threats to clean drinking water resources in Europe and the rest of the world. The groundwater and drinking water standard of nitrate is set to a maximum of 50 mg NO₃[−]/L in the European Union (EU), following the recommendations of the World Health Organization (WHO) [1]. This level is set to protect infants from the acute condition called blue baby syndrome (methemoglobinemia) [2,3]. However, recent studies have reported that long-term exposure to drinking water containing nitrate below the current standard is suspected to have chronic adverse effects [3–6]. For instance, studies have consistently reported that risks of colorectal cancer, thyroid disease, and central nervous system birth defects are strongly associated with ingestion of drinking water nitrate [3]. The EU has issued a series of directives, guidelines, and policies over the last decades to set the requirements of the drinking water standards (i.e., Drinking Water Directive) and to protect the drinking water resources (e.g., Water Framework Directive, Groundwater Directive, Nitrate Directive, and Directive on the Sustainable Use of Pesticides). Each country in the EU has implemented these legislations in their national laws differently, due to adjustment to local politico-socio-economic-agri-hydrogeological conditions [7,8]. The Drinking Water Directive primarily focuses on large water supplies. Small water supplies in rural areas have been given less attention, resulting in worse cases of drinking water quality [9,10].

The Organization for Economic Co-operation and Development (OECD) has proposed a bottom-up approach that integrates multiple local and regional stakeholders, such as farmers, citizens, drinking water suppliers, policy-makers, and scientists, as an effective approach for addressing local issues in relation to drinking water security, rather than the most common top-down approach at the national and EU level [11]. Research has also shown that the success of water protection plans depends on the social, technical, financial, and political capacity of the stakeholders and institutional arrangements, such as policies and regulations [12–15]. In addition, non-regulatory tools, such as training, information campaigns, education, or voluntary programs, have been shown to be effective in increasing the engagement of stakeholders and consequently lead to the successful implementation of water protection programs [12].

Common understandings of the cause and effect relations between the agricultural pressure and drinking water state may be a fundamental step in finding common and achievable goals among stakeholders and in planning drinking water protection programs [8,16,17]. However, the cause–effect relations are often difficult to identify. A long lag time between the use of fertilizer and its effects on water quality is often considered to be one of the reasons for unclear correlations between the agricultural pressure and water quality state [8,18,19]. When authorities and farmers implement mitigation measures (e.g., catch crops, set-aside, and buffer zones) as part of water protection planning, they may have to wait multiple decades to observe the effects on the water quality in some geological settings. Consequently, it may be inevitable that farmers become less engaged in water protection programs, unless they are well-informed in advance. In addition, information that is key to evaluating the cause–effect relations is monitored and managed by different institutions and government bodies [8]. Therefore, it is often difficult to gather coherent information to understand the complexity of the system.

The hydrogeological system that links the agricultural and drinking water systems may be the first-order control on regulating the relationships between these two systems; however, its importance has often been neglected in communication among stakeholders and the development of water protection plans. For example, the Driving force–Pressure–State–Impact–Response (DPSIR) framework is one of the most widely used conceptual frameworks in integrated water resource management to explain the causal relationships between society and the environment [20–25]. The DPSIR describes the feedback among social and economic developments, including the driving forces (D); pressures (P) on the environment; state (S) of environmental changes; impacts (I) on ecosystems, human health, and society; and a societal response (R) [26,27]. Under this framework, however, there is no component to explain the relationships between pressure and state, which may vary from site to site. The DPSIR

framework has previously been criticized for not addressing the dynamics of the system, and others have argued that there should be a focus on the links between the nodes of the DPSIR [22–25].

In this study, therefore, we proposed a new component, named “Link”, for the DPSIR framework in order to better explain the interactions between pressure and state, called DPLSIR (Figure 1). Furthermore, we suggested the lag time between agricultural pressure (i.e., nitrate inputs from the agricultural system) and water state (i.e., nitrate concentrations in the hydrogeological system) as a key link indicator. The contaminant of interest is nitrate. The objectives of this study are to evaluate a cross-correlation function analysis as a simple methodology for estimating lag times using data from three case study site in Europe (two in Denmark and one in France) and then to investigate controls of the temporal scale and spatial heterogeneity of lag times to better characterize the hydrogeological link between agricultural pressure and water quality state.

2. Conceptual Framework

2.1. The DPLSIR Framework

The DPLSIR framework focuses on the understanding of underlying controls for the relationships between pressure and state (Figure 1). Pressure, in this study, is the amount of agricultural stress released from the agricultural system. We define the agricultural system as the zone where all agricultural activities occur, and this zone is physically defined by the zone above the bottom of the soil layer (e.g., plough layer; Figure 2). The state is the quality of the water in the hydrogeological system. The hydrogeological system is defined by the entire zone below the soil layer through which water and contaminants move (Figure 2). In the hydrogeochemical system, various biogeochemical reactions may change the concentrations of nitrate. Nitrate reduction can occur both in the soil layer and below the interface between the oxic and reduced zones, where the reduction capacity—the amount of nitrate-reducing material, such as pyrite and organic carbon—is high (Figure 2). In some places, this interface can be several meters thick, developing in an anoxic nitrate-reducing zone. Link provides information about these hydrological and biogeochemical processes that are responsible for the release, retention, and transport of water, as well as contaminants. In this study, we focused on transport of water and contaminants—how and how fast nitrate moves through the hydrogeological system. Further research may require reviewing and developing indicators to parameterize release and retention of contaminants in the hydrogeological system.

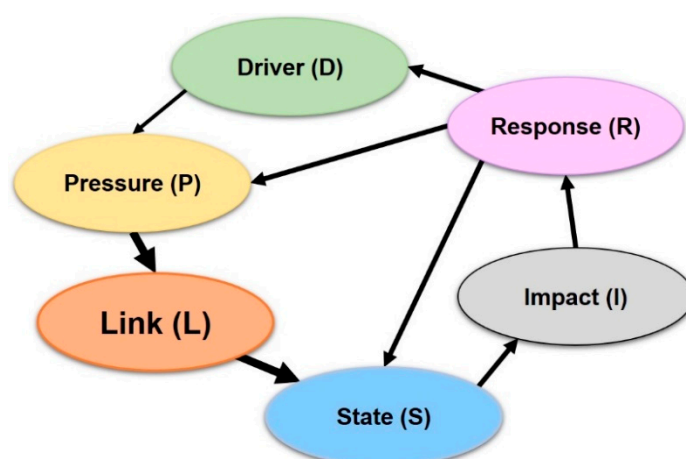


Figure 1. DPLSIR framework proposed in this study, including driving forces (D); pressures (P) on the environment; the link (L) between pressure and state; the state (S) of environmental changes; impacts (I) on ecosystems, human health, and society; and a societal response (R).

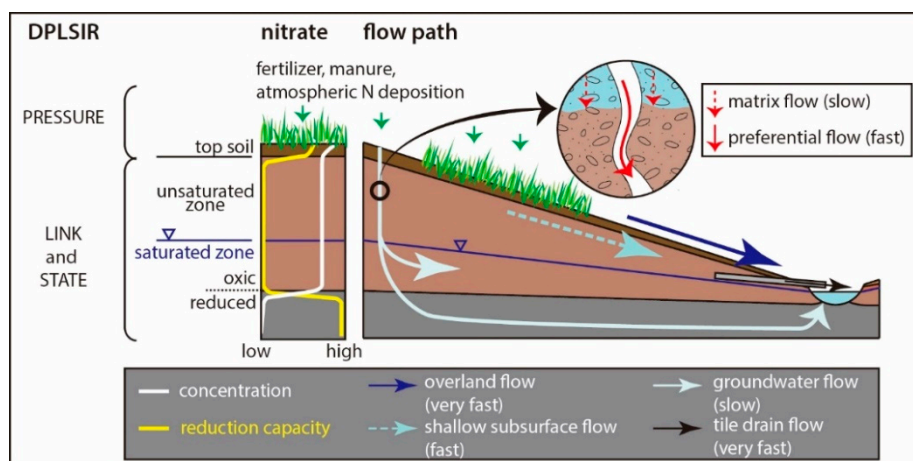


Figure 2. Conceptual understanding of the vertical distribution of nitrate from the agricultural system to the hydrogeological system and pathways in the hydrogeological system. The agricultural system is represented by the pressure indicators and the hydrogeological system is described by the link and state indicators. The reduction capacity is defined as the sum of solid nitrate-reducing compounds, e.g., pyrite and organic matter.

2.2. Link: Flow Pathways and Lag Time

Lag times not only quantify the delay time between the pressure stress and state response, but also reveal primary pathways of water and contaminants [28]. To recharge groundwater, water primarily flows vertically via matrix flow pathways and/or preferential flow pathways (Figure 2). This water eventually emerges in the surface water. Matrix flow is a pathway through pore spaces in the soil matrix. The lag times of matrix flow can be long (years to decades). Preferential flow is a pathway via macro-pores in soils and fractures in bedrock, bypassing a dense or less permeable matrix [29,30]. The macro porous spaces in soils can be created along root channels, soil fauna channels, cracks (i.e., freeze–thaw and wetting–drying), fissure, or soil pipes [29]. Preferential flow may be transiently active; however, it can deliver a significant quantity of contaminants with a very short time delay (hours to weeks) [31,32]. Therefore, the groundwater table and groundwater chemistry of matrix flow-dominated systems will exhibit relatively small variations and slow changes over time compared to those of preferential flow-dominated systems.

3. Materials and Methods

3.1. Case Study Sites

The three case study sites are intensive farming areas with groundwater-based drinking water abstraction. The first case study site is Tunø Island in Denmark (Figure 3). Tunø is a small island (area: 3.5 km²) located in the Kattegat Sea, between the North Sea and the Baltic Sea (Table 1). The main part of the subsurface of the island consists of clay-rich glacial deposits of Quaternary origin. However, in the northeastern part, where drinking water abstraction wells are located, Quaternary sandy deposits dominate the near-surface layers and contain an aquifer vulnerable to pollution (Figure 3). The groundwater is the sole source of drinking water and there is only one public water supply system, which produces approximately 10,000 m³/year of water for around 100 inhabitants and tourists.

During the 1970s, the farmers in the area around the drinking water abstraction wells changed from mixed conventional farming to intensive vegetable production, mainly the production of leeks, cabbages, and onions. This change in farming practice led to high inputs of mineral fertilizers. Since the mid-1980s, Denmark has adopted the EU directives on legislation at the national level to protect water resources, including groundwater [33]. On top of these national-level regulations, in Tunø, additional water protection plans have been implemented since 1989, mainly because high levels of nitrate were

detected in the abstraction wells ($\approx 150 \text{ mg NO}_3^-/\text{L}$). From 1989, the central part of the recharging area of the abstraction wells was set as a protection zone, and in 1991, this area was extended to more than double the size to cover the major parts of the recharge area (shaded with green in Figure 3). In this inner action area as well as one field at the western border of this area, all agricultural activity has been banned, and the land has been converted to set-aside with permanent grass. In the outer part of the recharge area (total protection area), fertilizer application has been regulated to the level of the economical optimum application of nitrogen for crop production (circled area in Figure 3).

Table 1. Overview of the basic characteristics of the case study sites.

	Tunø Island, Denmark	Aalborg-Drastrup, Denmark	La Voulzie Catchment, France
Study area (km ²)	0.25	9.92	115
Climate	Coastal temperate	Coastal temperate	Temperate
Geology	Quaternary glacial sediment	Quaternary glacial sediment and fractured limestone	Massive limestone
Source of drinking water	Groundwater	Groundwater	Groundwater (springs)
Drinking water production (m ³ year ⁻¹)	10,000	1.5 million	20 million
Number of consumers	100	26,000	400,000
Water protection plans and activities	Permanent grass over the recharging area	Afforestation in some places and protection zone limiting nitrate leaching to 25 mg/L and no pesticide use	Various agricultural measures
Contaminant of concern	Nitrate	Nitrate and pesticides	Nitrate and pesticides

The second case study site is Aalborg-Drastrup in Denmark (Figure 3). The case study area is in northern Jutland. In the area, thin layers of glacial sand and clay till deposits of Quaternary origin overlie a fractured Maastrichtian limestone reservoir. Like Tunø, groundwater is the only source of drinking water. There are well fields belonging to a public water supply system and several privately owned wells. The wells in the well field were constructed between 1958 and 2005, and the well field produces $1.5 \text{ mm}^3 \text{ year}^{-1}$ of water distributed to around 26,000 consumers in the Aalborg area (Table 1).

The groundwater in the Aalborg-Drastrup case study area is one of the most vulnerable aquifers to nitrate pollution in Denmark because of absent or thin protecting clay layers above the chalk aquifer with a low nitrate reduction capacity in the majority of the recharging area, except in the northernmost part where thick layers of marine clay overlay the chalk (Figure 3). At the same time, there are intensive dairy and pig farms in the area, as well as arable farms. During the 1980s, the water authorities realized that the drinking water abstraction was threatened by pollution of nitrate from the agricultural production. Like Tunø, therefore, additional water protection plans were introduced. Since 2001, a series of mitigation measures were implemented, including setting a protection zone (afforestation) close to the abstraction wells, limiting nitrate leaching from zero to less than 50 mg/L of nitrate, and banning the use of pesticide.

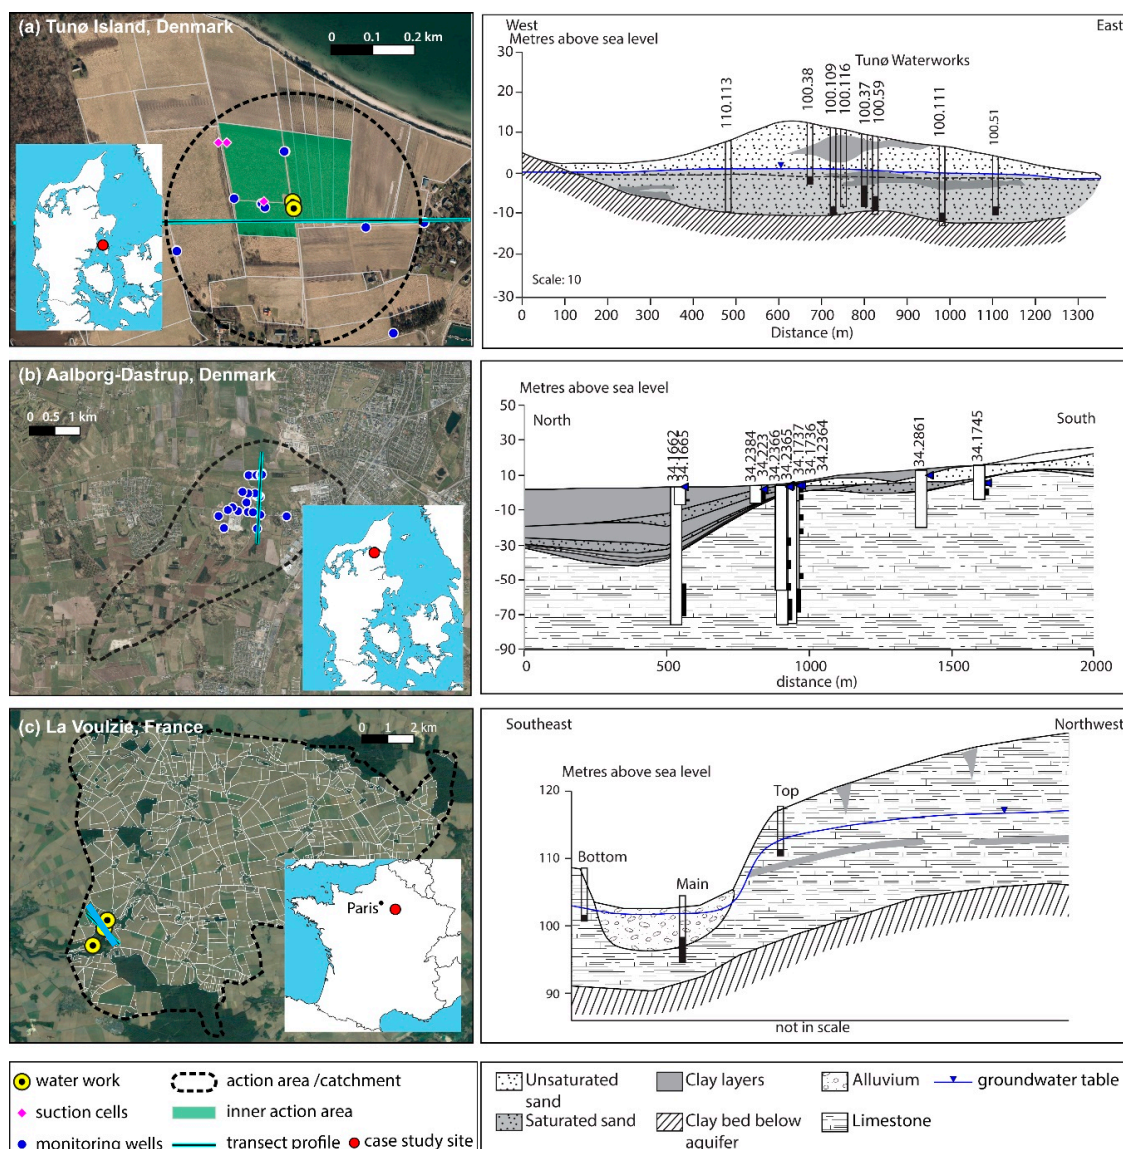


Figure 3. Maps of the three case study sites: Tunø Island, Denmark (a); Aalborg-Drastrup, Denmark (b); and La Voulzie, France (c).

The third case study site is the La Voulzie catchment area (drainage area: 115 km²) in France (Table 1). The catchment is located about 70 km southeast of Paris. The catchment is primarily underlain by massive limestone (Figure 3). The aquifer is one of the main resources in the water supply system (Ile-de-France) and a very important drinking water source for Paris. Eau de Paris is a public organization in charge of managing water resources for Paris. The catchment provides 20 mm³/year of water, which is equivalent to 10% of Eau de Paris's resources, to about 400,000 people. The catchment covers 15 rural municipalities with about 100 farmers (including one organic farmer). The area is intensively used by agriculture—90% of the surface area is cultivated, 40% of which is planted with wheat (in rotation with other cereals, rape seed, and sugar beet).

The highest potential nitrogen (N) leaching was achieved in the late 1980s. The agricultural action program was launched in 1991 for the watershed (Fertimieux) to limit high concentrations of nutrients. A change in fertilizer use occurred in the late 1990s in France. This change is attributed to the beginning of environmental awareness and anticipation of the Common Agricultural Policy in 1992. The nitrate concentrations in springs, which is raw water for drinking water production, have been relatively invariant at approximately 55–70 mg NO₃[−]/L for the last two decades.

3.2. Materials

For all three study sites, three types of historical data were collected to carry out the study: (1) N surplus, (2) groundwater chemistry, and (3) groundwater age. N surplus (or N balance) is used as an environmental indicator [34,35] and it has also been applied in many EU member states including Denmark and France. Furthermore, studies have reported that N surplus is a good indicator to explain N leaching from the soil and nitrate pollution in groundwater [36–39]. Methods and input data to calculate N surplus differ among the EU member states [40]. This study compared the temporal variability of agricultural N pressure and groundwater state of each case study site, not across the sites; therefore, the methodological differences would not affect the lag time analysis. N surplus is calculated with respect to farm gate (i.e., farm gate N surplus) or to soil surface (i.e., soil surface N surplus). In this study, soil surface N surplus was the primary agricultural N pressure indicator (unit: kg N/ha/year). N surplus of each case study site was calculated according to the member state's standard method, but in principal, soil surface N surplus calculates the differences between the annual quantity of N entering the soil and the annual quantity of N leaving the soil surface by harvested crops. For Tunø and La Voulzie, the soil surface N surplus at the relevant catchment scale was used and for the Aalborg-Drastrup site; both soil surface and farm gate N surpluses at the regional level were used. The water chemistry data were time series of nitrate in any type of water, e.g., soil pore water and groundwater. The annual average concentration of nitrate in water was used as a water quality state indicator (unit: mg NO₃[−]/L). The groundwater age data were measured or simulated values of residence times and/or water ages (unit: year). A few studies have reported chlorofluorocarbon (CFC) reduction in reduced groundwater [41,42]; hence, in this study, we only collected data of oxic and nitrate-reducing groundwater. In this study, we did not conduct extra measurements. Instead, we focused on existing data available from public databases and reports, where the data have been collected and reported following the national regulations and official guidelines at the time of collection.

3.2.1. Tunø Island, Denmark

For the Tunø study sites, input data to calculate soil surface N surplus at field scale were available; therefore, this was calculated for the period from 1975 to 2018 at the 345 m² outer protection area. A time series of modeled annual atmospheric N deposition is publicly available at the municipality scale (2006–2016) [43]. Time series of the main crop type and fertilization were constructed for Tunø for the period of 1975–2018, at the field scale. Recent data (2010–2018) on the main crop type are available from the Ministry of Environment and Food, Danish Agricultural Agency [44], while older data from the Tunø study site were reconstructed from information on crop rotations obtained from reports [45,46]. Information on the use of fertilizer was based on reported values [46].

In Denmark, all the groundwater chemistry data are registered in the national borehole database, JUPITER, and are managed by the Geological Survey of Denmark and Greenland. The data are publicly available. Therefore, nitrate data for both Danish case study sites were obtained from JUPITER [47]. In Tunø, groundwater ages were determined at seven monitoring points using the CFC method [48].

3.2.2. Aalborg-Drastrup, Denmark

Soil surface N surplus at regional scale (1990–2018) was used for the Aalborg-Drastrup site, and the detailed method and input data for the calculations are described in Windolf et al. [49]. Hansen et al. [50] reported farm gate N surplus of Denmark at the geo-region scale for the period of 1950–2007. Between 1990 to 2007, the soil surface N surplus was offset by 39 kg/ha/year on average compared to the farm gate N surplus; therefore, the soil surface N surplus for the Aalborg-Drastrup site before 1990 was estimated from the farm gate N surplus by subtracting the offset.

Within the action areas of the Aalborg-Drastrup site, monitoring wells that are part of the national groundwater monitoring program are located (Figure 3). The groundwater chemistry of these wells has been monitored regularly since 1989, and groundwater age was also determined using the CFCs

method [51]. The groundwater chemistry and groundwater age data were extracted from JUPITER and the report [51].

3.2.3. La Voulzie, France

For the La Voulzie site, the N surplus calculated at the University of Tours was used, with detailed description of the calculation being found in Poivert et al. [52]. The methods for N surplus calculation of Denmark and France are similar. The N surplus for the study area was extracted from an online tool available for France (Cassis-N; <https://geosciences.univ-tours.fr/cassis/login>) [52,53]. The concentrations of nitrate were collected by the water company “Eau de Paris” at the “La Voulzie” springs. Water chemistry has been monitored since 1927. The water chemistry was monitored 1–4 times per year before 1986 and then every month after 1986. In this study, we focused on three sampling points: top, main, and bottom springs, which are naturally under pressure (Figure 3). The main spring is the primary source of drinking water produced at the water company, and its volume represents 45% of the total volume of the drinking water production. The top spring collects water in the top limestone layer over the thin clay layer that is situated about 5 m below the land surface (Figure 3). The bottom spring and the main spring collect water in a ≈ 10 m thick limestone layer situated below the thin clay layer (Figure 3). The average depth of the three wells is 14 m, and the groundwater table at the main spring is 1 m below the land surface.

3.3. Lag Time Estimations

The lag time between soil surface N surplus (x) and annual average concentrations of nitrate in water (y) was calculated using a cross-correlation method (CCF) using a correlation coefficient function of Matlab. The CCF method assumes a linear dependency of two variables, i.e., soil N surplus and nitrate concentrations, and the lag time is the time difference between a soil surface N surplus peak and a nitrate concentration peak. The lag times were calculated for a range of time lags (k ; year); for example, a correlation between x at time t and y at time $t + k$ was calculated. The range of k was from 0 to 50 years. The CCF provides two main results: (1) the strength of the correlations between x and y (correlation coefficient, r), and (2) the significance of the correlation (p -value). The strength of the correlation varies between 0 (no correlation) and ± 1 (strong correlation). The highest r and statistically significant k -year was defined as lag time.

4. Results

4.1. Time-Series of Surface Soil N Surplus and Water Chemistry

Figure 4a shows the soil surface N surplus at the field scale calculated in this study and the farm gate N surplus at the geo-regional scale of Tunø Island [50]. When the protection plans were first introduced, the soil N surplus at the field scale from the agricultural system in the inner action area decreased to the input from the atmospheric deposition, as no other input and no harvest occurred from those fields (yellow circles in Figure 4a). No manure was applied in both the inner and the outer protection area. The soil N surplus at the field scale of the total protection area was averaged at 35 kg N/ha/year before the protection plan period (1975–1990) and was averaged 12 kg N/ha/year after that (1991–2018; gray bars in Figure 4a). The farm gate N surplus at the geo-regional scale peaked around the mid-80s (≈ 90 kg N/ha/year) and has decreased since then (≈ 40 kg N/ha/year), which is explained by the effects of the national N regulations [50]. The farm gate N surplus at the geo-regional scale was much higher than the soil surface N surplus at the field scale (Figure 4a). The discrepancy may be because of stricter regulations implemented at the local scale.

As a result of the intensified agriculture, the nitrate concentrations in groundwater and drinking water increased up to >100 mg NO_3^-/L in the 1980s (Figure 4d). As the protection plans set in, nitrate concentrations in soil pore water and groundwater started to respond. The annual average concentrations of nitrate of soil pore water (1.2 m) in the inner protection area decreased nearly to zero almost instantaneously

(Figure 4b). The annual average concentration of nitrate in shallow groundwater (<9 m deep) started to decrease a few years after the protection plans (Figure 4c) and those in the deeper groundwater slowly decreased down to ≈ 10 mg NO_3^-/L over the past two decades (Figure 4d). The annual average concentration of nitrate of groundwater in the outer protection area also decreased over time, but the concentrations were still relatively high (50–100 mg NO_3^-/L ; Figure 4e).

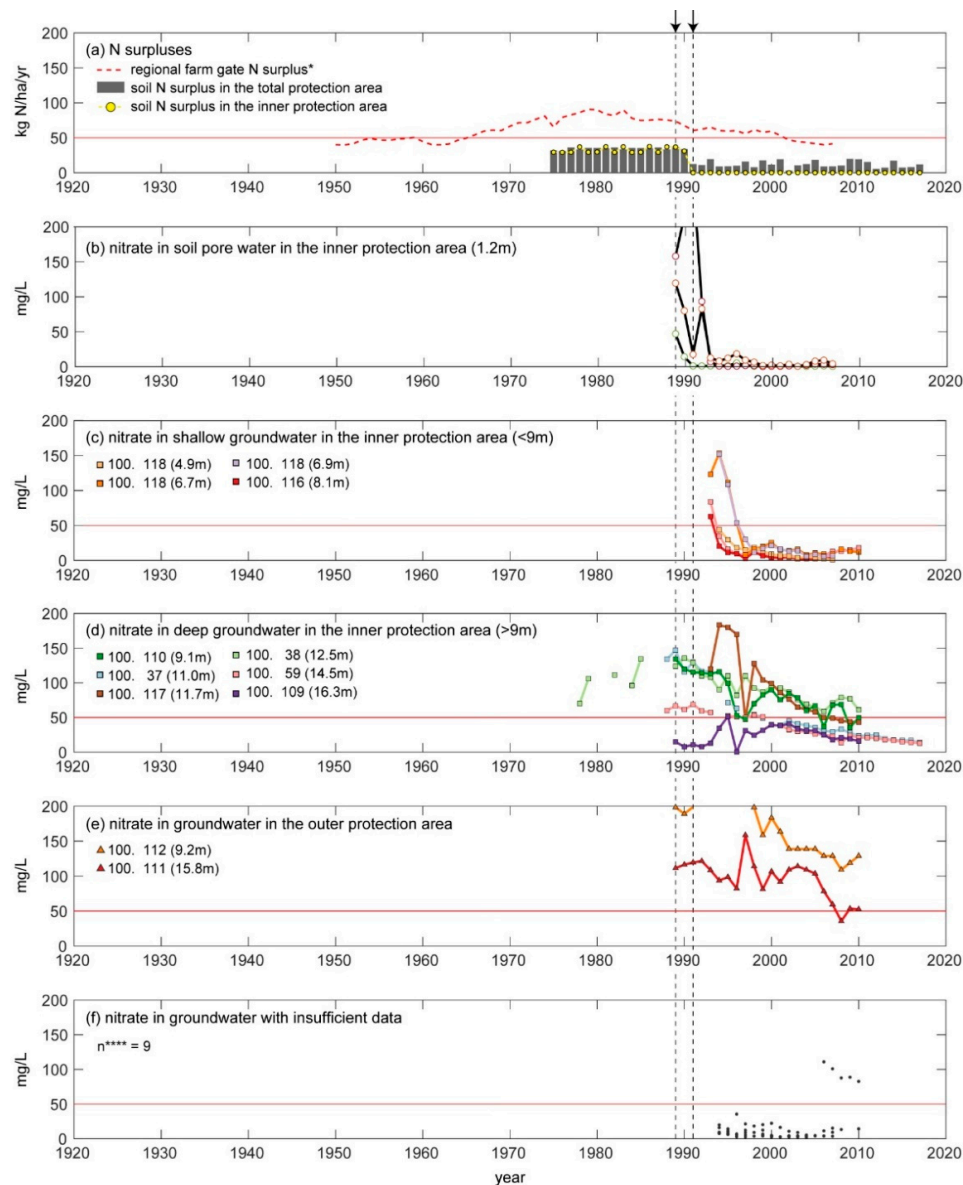


Figure 4. Overview of the nitrogen (N) surpluses and annual averages of nitrate concentrations in the soil pore water and groundwater of Tunø Island, Denmark. (a) The soil surface N surplus at the field level of the inner protection area and in the total protection area are shown in yellow circles and gray bars, respectively. The black arrows and dotted vertical lines show the years that the mitigation measures were implemented. The horizontal red line is the drinking water standard for nitrate (50 mg/L). The annual average concentrations of nitrate in soil pore water (circles), shallow groundwater (squares), and deep groundwater (squares) in the inner action area are shown in (b–d), respectively. Those of groundwater in the outer protection zone (triangles) are shown in (e). (f) shows the annual average nitrate concentrations of nine (**** n = 9; dots) monitoring points where the cross-correlation function (CCF) analysis could not be conducted due to either small variabilities of nitrate concentrations or an insufficient data length (* Hansen et al. [50]).

In terms of Aalborg-Drastrup, the two regional N surpluses, the soil surface and the farm gate, are shown in Figure 5a. These regional scale data do not precisely represent the impact of the mitigation measured implemented at the local level; however, they may be a good proxy to estimate the overall trend of agricultural N pressure of the study area. The soil surface N surplus decreased from 159 kg N/ha/year in 1990 to 83 kg N/ha/year in 2018. In this period, the annual input of manure was at a stable level of approximately 104 kg N/ha/year, while the input of mineral fertilizer decreased from 139 to 70 kg N/ha/year, as mitigation measures for higher utilization of N in manure were implemented, e.g., higher manure storage capacity and increased manure application in spring and summer rather than in the period with higher leaching in autumn and winter.

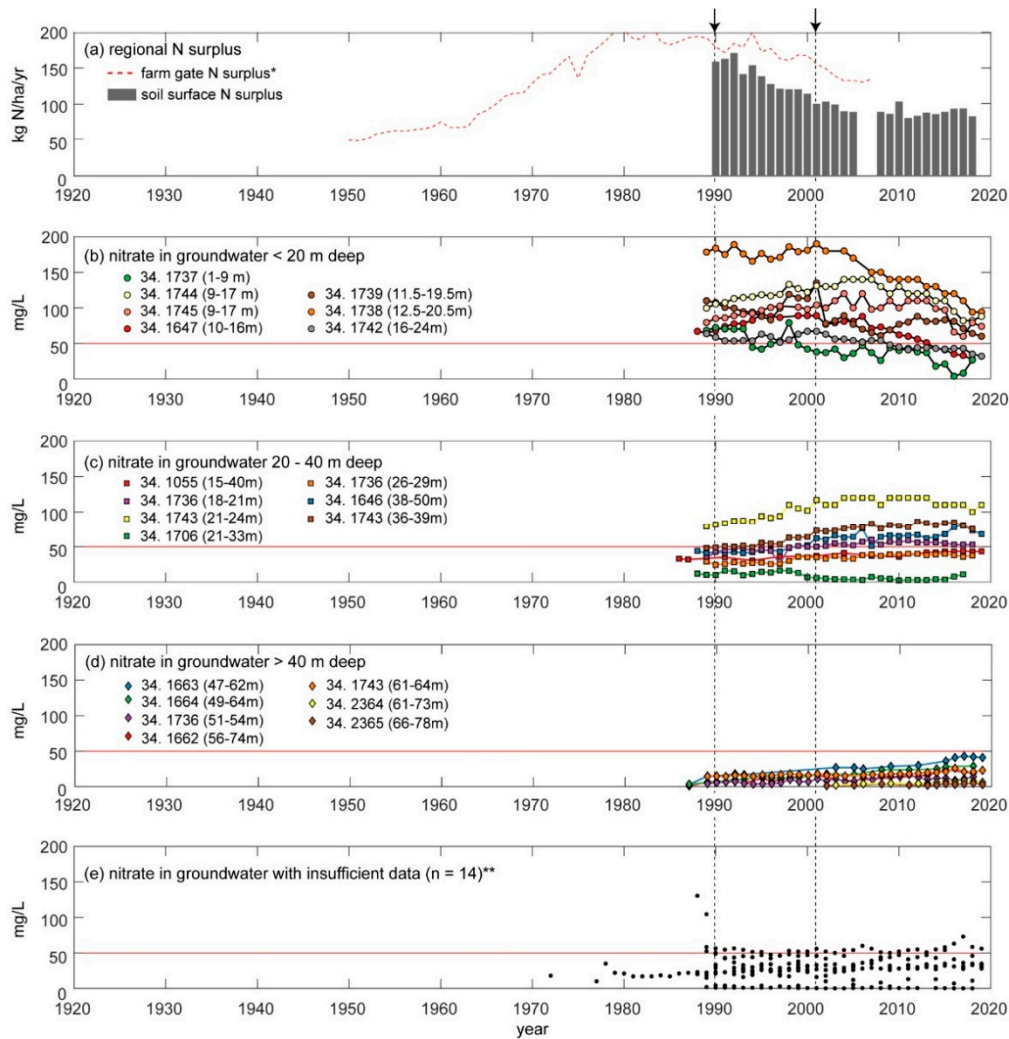


Figure 5. Overview of regional N surpluses and annual averages concentrations of nitrate in groundwater of Aalborg-Drastrup. The soil surface N surplus and farm gate N surplus at the regional scale (* Hansen et al. [50]) are shown in (a). The annual average concentrations of nitrate of shallow (filter interval < 20 m), middle (filter interval between 20 and 40 m), and deep groundwater (filter interval deeper than 40 m) are shown in (b–d), respectively. Those of groundwater with insufficient data and no temporal variability are shown in (e). The annotations in the figure are the same as those of Figure 4. ** number of groundwater wells.

In the monitoring site of the Aalborg-Drastrup (Figure 3), the annual average concentrations of nitrate of groundwater varied within a wide range (1–200 mg NO_3^-/L), and their temporal variability also was heterogeneous (Figure 5b–e). The groundwater in shallower depth (filter interval < 20 m) showed the greatest temporal variability, and the nitrate concentrations showed peaks around

2000–2010 and decreased over time (Figure 5b). The groundwater measured between 20–40 m intervals showed relatively damped responses (Figure 5c). In some monitoring points, the nitrate concentrations peaked around 2010 and slowly decreased over the past 10 years (e.g., 34. 1743 in Figure 5c). While nitrate of groundwater in the deeper intervals (>40 m) were relatively low, i.e., <10 mg NO₃[−]/L, in some groundwater wells, the concentrations continuously increased over the entire monitoring period (e.g., 34. 1663 in Figure 5d). At 14 monitoring points, either the groundwater was in reduced conditions, the nitrate concentrations were temporally invariant, or the nitrate concentrations showed only increasing trends (Figure 5f).

In the La Voulzie catchment area, the soil surface N surplus at the catchment scale was highest around the mid-80s (≈ 77 kg N/ha/year) and then decreased to ≈ 55 kg N/ha/year around 1990 (Figure 6a). Over the past 30 years, the soil surface N surplus ranged between 15 and 66 kg N/ha/year (Figure 6a). The groundwater chemistry has been monitored since 1927. Until the 1960s, the annual average concentrations of nitrate of groundwater and spring waters ranged between 20 and 25 mg NO₃[−]/L, but the level continuously increased up to 50–110 mg NO₃[−]/L until 1993 (Figure 6b). The nitrate concentrations of the top spring decreased back to approximately 74 mg NO₃[−]/L around 2000 and then were temporally invariant for the last 20 years at this level (Figure 6b). Those of the main and bottom springs also were relatively stable at around 55 mg NO₃[−]/L for the last 30 years (Figure 6b). The monthly data revealed that the nitrate concentrations of all three springs did not show any seasonality—standard deviations of all the nitrate measurements between 2000 and 2014 were 2.8 (top spring), 2.2 (main spring), and 1.8 (bottom spring).

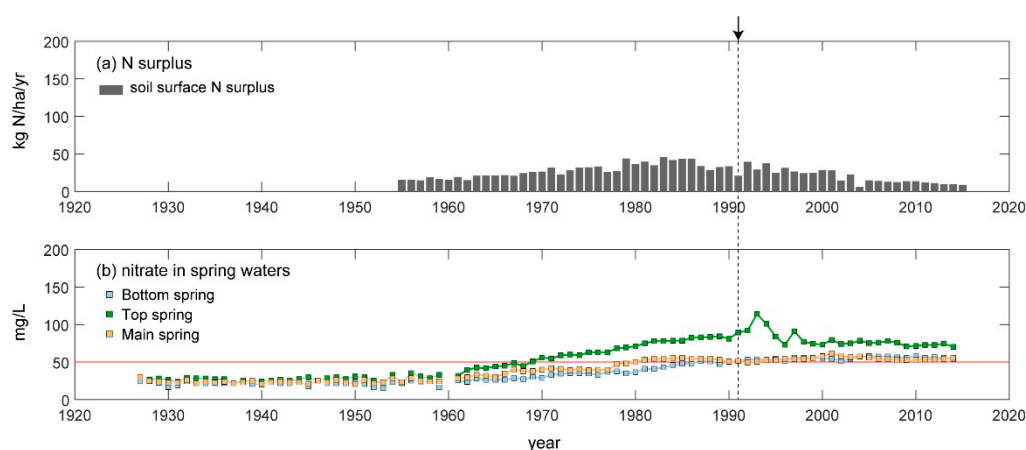


Figure 6. Overview of the soil surface N surplus (a) and annual average concentrations of nitrate of groundwater (spring) of La Voulzie (b). The figure annotations are the same as those of Figure 4.

4.2. Lag Time between Agricultural Pressure and Groundwater Quality State

Table 2 summarizes the results of the lag time analysis of the case study sites and water chemistry. For the Tunø site, at the 15 points with statistically significant results, the soil surface N surplus showed strong correlation with the annual average concentrations of nitrate in water. For example, except for the deepest groundwater, the correlation coefficients were higher than 0.76 and the results were statistically significant ($p < 0.005$) in all the cases (Table 2). For the deepest well (monitoring point 100. 109), which is in nitrate-reducing conditions, the correlation coefficient was 0.53, and it was statistically significant ($p < 0.05$; Table 2). The lag times progressively increased with an increasing depth (Figure 7a and Table 2). For instance, the soil pore water measured at 1.2 m below the land surface and showed lag times of 0–2 years, while the deep wells (deeper than 10 m) showed lag times of 5–16 years.

Table 2. Summary of water chemistry and the lag time estimation.

	Observation Period of Water Chemistry Data (Total Number of Observations)	Average of Nitrate in mg/L (Standard Deviation)	Average of Dissolved Oxygen in mg/L (Standard Deviation)	Lag Time in Years (Correlation Coefficient)	Groundwater Age (Year)
Tunø Island, Denmark					
Soil pore water (3 points)	1989–2007 (130–142)	35 (69)	-	0–2 (0.75–0.85) **	
100. 118 (4.92 m)	1994–2007 (20)	16 (14)	7.3 (0.1)	5 (0.81) **	
100. 118 (6.72 m)	1993–2010 (30)	44 (54)	7.8 (1.9)	5 (0.85) **	
100. 118 (6.92 m)	1994–2007 (26)	49 (59)	6.8 (3.9)	5 (0.82) **	
100. 116 (8.07 m)	1993–2010 (28)	9.8 (13)	5.5 (0.2)	3 (0.76) **	
100. 110 (9.1 m)	1989–2010 (44)	87 (30)	6.7 (1.2)	4 (0.76) **	15
100. 112 (9.2 m) [†]	1989–2010 (40)	176 (38)	3.7 (1.1)	9 (0.86) **	15
100. 37 (11 m)	1989–2017 (50)	77 (43)	3.7 (1.8)	5 (0.87) **	
100. 117 (11.7 m)	1993–2010 (30)	100 (50)	4.6 (2.3)	6 (0.78) **	
100. 38 (12.5 m)	1978–2010 (53)	118 (34)	5.3 (1.1)	8 (0.78) **	21
100. 59 (14.5 m)	1985–2017 (76)	44 (19)	2.3 (1.9)	10 (0.88) **	
100. 111 (15.8 m) [†]	1989–2010 (40)	100 (26)	0.2 (0.2)	16 (0.77) **	22
100. 109 (16.25 m)	1989–2010 (40)	24 (13)	0.2 (0.2)	20 (0.53) *	26
Aalborg-Drastrup, Denmark					
34. 1737 (1–9 m)	1989–2018 (45)	43 (19)	1.9 (1.7)	3 (0.78) **	21
34. 1744 (9–17 m)	1989–2019 (46)	119 (15)	8.2 (0.9)	16 (0.78) **	23
34. 1745 (9–17 m)	1989–2019 (44)	95 (18)	8.7 (0.7)	23 (0.48) *	20
34. 1647 (10–16 m)	1988–2018 (45)	69 (18)	0.4 (0.3)	12 (0.90) **	22
34. 1739 (11.5–19.5 m)	1989–2019 (45)	88 (18)	6.8 (0.8)	9 (0.73) **	16
34. 1738 (12.5–20.5 m)	1989–2019 (42)	158 (27)	6.8 (1.6)	12 (0.94) **	16
34. 1055 (15–40 m)	1986–2019 (18)	38 (4.5)	4.5 (1.1)	26 (0.84) **	
34. 1742 (16–24 m)	1989–2019 (45)	53 (8.4)	5.7 (0.6)	10 (0.83) **	30
34. 1736 (18–21 m)	1989–2018 (44)	50 (7.3)	4.7 (1.6)	28 (0.76) **	19
34. 1706 (21–33 m)	1988–2017 (46)	8.1 (4.8)	6.2 (2.2)	4 (0.78) **	8
34. 1743 (21–24 m)	1989–2019 (44)	106 (14)	8.6 (0.9)	25 (0.91) **	26
34. 1736 (26–29 m)	1989–2018 (44)	34 (5.3)	3.4 (0.4)	29 (0.92) **	30
34. 1743 (36–39 m)	1989–2018 (43)	69 (13)	7.5 (0.5)	29 (0.96) **	40
34. 1646 (38–50 m)	1988–2019 (45)	57 (12)	5.2 (0.3)	29 (0.88) **	28
34. 1663 (47–62 m)	1987–2019 (17)	26 (12)	3.2 (2.5)	28 (0.86) **	
34. 1664 (49–64 m)	1987–2018 (20)	16 (7.8)	2.4 (2.5)	35 (0.98) **	
34. 1736 (51–54 m)	1989–2018 (43)	9.3 (3.7)	0.7 (0.5)	29 (0.82) **	48
34. 1662 (56–74 m)	1987–2018 (15)	11 (6.2)	0.8 (0.3)	29 (0.86) **	
34. 1743 (61–64 m)	1989–2019 (42)	18 (2.6)	3.4 (0.3)	42 (0.91) **	46
34. 2364 (61–73 m)	2003–2019 (12)	5.5 (1.9)	1.2 (1.3)	38 (0.95) **	
34. 2365 (66–78 m)	2002–2019 (14)	3.0 (1.2)	1.1 (2.1)	38 (0.76) *	
La Voulzie Catchment, France					
Top spring	1928–2014 (456)	66	-	8 (0.78) **	–
Main spring	1927–2014 (469)	47	9.2	15 (0.70) **	–
Bottom spring	1927–2014 (463)	43	9.9	24 (0.83) **	–

* Statistically significant at $p < 0.05$; ** $p < 0.005$; [†] outer protection zone.

In the Aalborg-Drastrup site, at 21 of the 35 monitoring points, the nitrate concentrations in groundwater showed significant correlations with the surface soil N surplus at the regional scale (Table 2). Except for one monitoring point (34. 1745 in Table 2), the correlation coefficients were higher than 0.73 and they were statistically significant ($p < 0.005$). Like Tunø, the lag times roughly increased with an increasing depth; however, they showed a greater variability (Figure 7 and Table 2). For example, at the filter interval between 21–33 m (34. 1706), 4 years of lag year was estimated. In the deeper part of the groundwater (>40 m), the lag times also varied between 29 to 42 years.

In the La Voulzie catchment area, the soil surface N surplus and the annual average concentrations of nitrate of all three springs showed strong ($r = 0.70$ – 0.83) and statistically significant correlations ($p < 0.005$). The lag times estimated for the top, main, and bottom springs were 8, 15, and 24 years (Table 2).

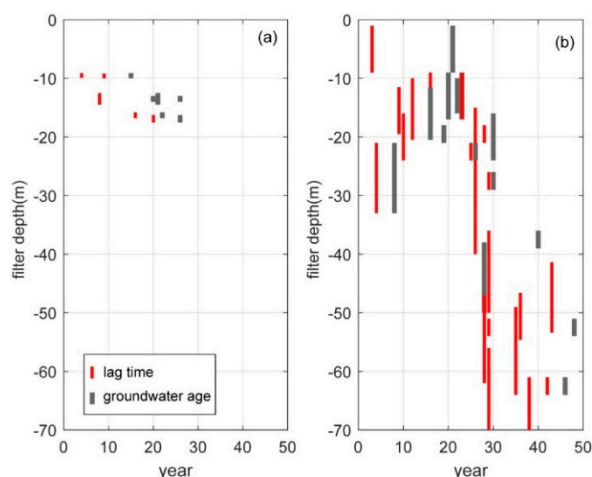


Figure 7. Groundwater ages (chlorofluorocarbon (CFC) measurements) and lag times (CCF statistical estimates) of groundwater in (a) Tunø and (b) Aalborg-Drastrup. The intervals of the intake filters are on the y-axis.

4.3. Groundwater Age

For the Danish case study sites, groundwater age data were collected to compare them with the lag time analysis results. In Tunø, groundwater age data are available at five monitoring points in the inner action area and at two points outside the inner action area [48]. Like the lag time, the groundwater age of the Tunø groundwater linearly increased with an increasing depth (Figure 7a). However, the groundwater ages for the same depth were 6–14 years longer than the lag times estimated in this study (Figure 7a). In the Aalborg-Drastrup site, like lag times, groundwater ages varied widely with depth (Figure 7b). For instance, young groundwater (<10 years old) was found at 21–33 m below the land surface, while old groundwater (≈ 20 years old) was found in the near surface groundwater (Figure 7b). Like in Tunø, the groundwater ages were relatively longer than the lag times calculated in this study.

5. Discussion

5.1. Methodological Evaluation of the Lag Time Estimation and Data Requirements

Lag times may be one of the key pieces of information for developing water protection programs and setting achievable goals [54–57]. Various models have been developed to estimate the lag times between mitigation measures and the water quality changes [55–59]. Most models are process-based and provide comprehensive views of the system. Modelling is applicable both data-rich and data-poor sites [55]. However, these models often require scientific and technical training to use them. Therefore, these tools may not be readily available for many stakeholders. Furthermore, such models are often based on various assumptions; therefore, building trust on the modeling results may require considerable efforts. Studies have reported that involving the stakeholders in the modelling processes improve the acceptable of the modeling results [55]. This study selected the CCF analysis, which is based on direct measurements. This method is a simple, intuitive, and easy-to-use method for the stakeholders. Such measurement-based methods require good quality and quantity of data [55], and we also found that the CCF analysis may provide meaningful and statistically significant results if the following conditions are satisfied.

First, continuous, long-term monitoring data on both the agricultural pressure and groundwater state should be available. Obviously, the time series of the data must be sufficiently long to document the cause and effect relations between the pressure and state. For example, in La Voulzie, both agricultural pressure and groundwater state data were available for nearly a century and could thus fully cover the changes in agricultural pressure and the groundwater state responses (Figure 6). For the two Danish sites, regional long-term farm gate N surplus data indicated the trends in agricultural

pressure, confirmed by overlapping more recent soil surface balances. These long-term data allowed statistical analysis and the results of the CCF analysis were statistically significant. However, links between regional N-surplus pressure data and effects on resulting levels of nitrate leaching should be subject to further research [40]. Supplementary analyses of more detailed historical, agricultural pressure data [60] for the local Parishes covering both of the two Danish sites showed that the farm gate N surplus levels for both Tunø (represented by the Parish of Tunø) and Aalborg-Drastrup (represented by the two Parishes of Dall and Navling) were about 20% and 10% lower than the regional balances shown in Figures 4 and 5, respectively, but with similar decadal trends. This confirms the validity of the current analyses. Furthermore, the local data confirmed the high decrease in N surplus pressure for Tunø after the 1980s, as well as historical trends back in time similar to the regional results. For Aalborg-Drastrup, the agricultural pressure according to local agricultural N-surplus followed the regional trend after 1980 but was significantly higher before 1980. Thereby, the value of localized data about links between agricultural pressures and lag time in groundwater quality was supported.

Second, particularly for evaluating the effectiveness of the mitigation measures, the time series should capture the changes in pressure and state. For instance, in Tunø, at some sampling points, groundwater monitoring had started a few years after the protection plans were implemented (Figure 4f). The nitrate concentrations in those wells already decreased below 10 mg NO₃[−]/L, and they were relatively invariant over time. With these time series, the CCF analysis cannot produce statistically meaningful results.

Third, in cases of the groundwater state, only oxic groundwater should be considered because nitrate is redox-sensitive. In nitrate-reducing and/or -reduced conditions, nitrate concentrations decrease not only because of the changes in the inputs from the agricultural system, but also because of biogeochemical reactions (denitrification to gaseous N compounds) in the subsurface. If the denitrification reactions dominantly control the nitrate concentrations in groundwater, the correlations between the agricultural pressure and groundwater state might not be strong or statistically significant. For example, in Tunø, the deepest groundwater (100–109) was nitrate-reducing, the CCF analysis estimated weak correlations, and one of the pressure indicators showed an insignificant result (Table 2). These results are attributed to its nitrate-reducing condition. In this well, oxygen was nearly depleted, but its nitrate concentrations were much lower (approximately 25 mg NO₃[−]/L) than the overlying part of the groundwater (44–170 mg NO₃[−]/L), indicating that nitrate had begun to be reduced. Therefore, to evaluate the effects of agricultural activities, including mitigation measures, on the groundwater quality, the role of nitrate reduction reactions in the hydrogeological system should be excluded.

5.2. Hydrogeological Control of Lag Times

The hydrological system determines the pathways between a source (i.e., agricultural soil) and a sink (i.e., groundwater) and the travel speed of the contaminants through the pathways. All the hydrogeological systems, however, have complex networks of flow pathways, and this complexity has been a major challenge in communication among stakeholders, water authorities, and scientists. To develop a water protection program with local stakeholders, it may be more important to identify the most dominant pathways of water and nitrate transport, rather than to fully understand the complexity of the hydrogeological system. By targeting the primary pathways, the efficiency of the mitigation measures may be increased [19,61]. The main role of the link indicators is to reveal the primary pathways of the site so that the stakeholders can develop action plans and set achievable goals. Tunø is a sandy aquifer underlain by Quaternary glacial deposits, where heterogeneous geology and flow pathway network are expected. However, our data showed that lag times and groundwater ages linearly increased with an increasing depth at this site (Figure 7a). These results imply that the signals of the agricultural pressure are propagated downward, predominantly via matrix flow (i.e., diffusion and dispersion through the porous medium) to groundwater. In a matrix flow-dominated system, the groundwater state may respond to the agricultural pressure slowly, which is consistent with the relatively long lag times of the Tunø site.

The Aalborg-Drastrup site is underlain by limestone. Limestone aquifers are also well known for their complexity and anisotropy of flow networks because both matrix flow via porous medium and preferential flow via fractures play a key role in transporting water and contaminants [62]. This complexity may explain why the lag time and residence times heterogeneously varied with depth. When preferential flow via large fractures is the dominant pathway, the agricultural pressure signals will rapidly propagate to groundwater, and consequently young groundwater and short lag times can be found at deep depths in this case (Figure 7b). Conversely if matrix flow via porous medium or macroscale fractures plays a more important role in delivering water and nitrate, the groundwater state responses will be significantly delayed. At the Aalborg-Drastrup site, we observed both patterns and these observations imply that both pathways may be active. In this case study site, mitigation measures that target rapid (i.e., preferential flow) and slow (i.e., matrix flow) pathways will be needed.

La Voulzie is also underlain by limestone. A previous study using multiple tracers in this area revealed that, at this site, nitrate transport mainly occurs through matrix flow on a long-term timescale [63]. Consistent with this, the lag times of nitrate were 8–24 years (Table 2) and the monthly water chemistry data showed no seasonal variations. At this site, therefore, a long-term water protection program will be necessary. Furthermore, the results also show that the lag time variability among the springs may be explained by the hydrogeological structure of the subsurface. At the top spring, the estimated lag time is shorter than those of the other two springs. These differences may be because the top spring is located above the relatively impermeable clay layer (Figure 3), while the other two are located below it. Therefore, the top spring may receive water that circulates only within the top limestone layer. In sum, we conclude that the link indicators may be useful for better understanding of how water and nitrate move through the hydrological system and selecting the best mitigation measures. The underlying hydrogeology is the primary control of the relations between the agricultural pressure and groundwater state. Therefore, the hydrogeological system should be well-characterized in the context of the objectives and the spatial and temporal scales of the water protection programs.

5.3. Link Indicators: Groundwater Age vs. Lag Time

The time lags between pressure and state can also be estimated through groundwater age measurements using environmental tracers such as CFCs, $^3\text{H}/^3\text{He}$, and noble gases (Ar, He, Kr, Ne, and Xe) if the contaminant is highly soluble [64–68]. Nitrate is primarily transported as solutes and behaves conservatively in the oxic zone; therefore, the groundwater age may be a useful indicator for estimating the time lag of groundwater state responses. Indeed, previous studies of groundwater ages and groundwater chemistry have successfully documented the changes of nitrate concentrations in groundwater chemistry as responses to the changes of regulations or agricultural practices at decadal scale [64–68].

Our results show that the lag times estimated using the statistical CCF method were shorter than the measured CFC groundwater ages in Tunø. Such differences could be attributed to uncertainties associated with each measurement; however, in principle, lag time and groundwater age represent two different hydrological timescales. Lag time measures the time difference between a pressure peak and a state peak; therefore, it quantifies how fast a water parcel or an input signal moves through a groundwater system [69]. In other words, lag time is transit time. Comparatively, groundwater age is the mean residence time of the water; therefore, it is related to water mass movement and the volume of the groundwater. If the lengths of pathways of a hydrogeological system are identical, its lag time is half of the mean residence time [70]. However, such hydrogeological systems do not exist. The lengths of pathways are greatly different, even for a relatively homogeneous system; therefore, some signals can propagate through the system via short pathways (i.e., short lag time), while the rest take longer pathways (i.e., long residence time). In other words, water can be contaminated quickly, but it will take much longer to remediate it.

When the lag time and groundwater age are used as link indicators in communications with stakeholders, it is important to make a distinction between these two link indicators and to assess the

limitations of each indicator. The CCF method is a statistical analysis tool and it does not provide process-based understandings of the lag time between the agricultural pressure and groundwater state. The lag time is controlled by the interplay between hydrological and biogeochemical processes [71], which potentially results in an unclear correlation between the agricultural pressure and groundwater state and in highly uncertain estimations of lag times. Therefore, lag time results should be carefully examined on the basis of good understandings of the hydrogeological system.

The groundwater age is the mean age of the exiting waters at the monitoring point in the aquifer, and it does not provide information about the age distribution by itself. Information about the age distribution, however, may be critical to identifying the sources and timing of the contamination [72] and to estimating the time span of the water protection plans. If the ages of a water body show a normal distribution, for example, then it will take twice as long as the mean residence time to replace all the waters in the water body. However, it is well documented that groundwater is a mixture of waters with vastly different ages, often displaying a skewed distribution with a long tail or a bimodal distribution (e.g., [72,73]). Several models and multiple tracers methods are available to estimate the distribution of water ages, and different methods may predict different distribution patterns (e.g., [66,72,74]). Therefore, when using the groundwater age as a link indicator, the age distribution and limitations associated with the employed method should be provided.

5.4. Lag Time as a Criterion for the Selection of Pressure and State Indicators

Because different stakeholders have different interests, they focus on different aspects of drinking water protection plans. For example, farmers may be interested in the effects of the implemented measures on their fields. For the field level evaluation, the spatial scale of the agricultural N pressure (i.e., N surplus) will be essential. For example, the farm gate N surplus at the geo-regional scale of the Tunø case study site did not show the effects of the local mitigation measures, whereas soil surface N surplus at the field scale showed instantaneous reduction (Figure 4a). Indeed, many EU member states have adopted N surplus (or N balance, N budget) at the field level as an advisory or regulatory tool [40]. For instance, the Danish agriculture and Food Council works on a fertilizer planning system that precisely calculates the soil surface N balance and surplus on individual fields of the farmer, giving the farmer the opportunity to take this soil surface N surplus into account when the farmer plans the application of mineral and manure nitrogen to his or her crops. Therefore, farmers can readily calculate N surplus at the field scale.

In combination with the soil surface N surplus, soil pore water chemistry may be useful to evaluate the effects of mitigation measures at the field scale because of its short lag time. Our results show that nitrate in soil pore water responds to the agricultural pressure almost instantaneously (lag time between 0 and 2 years; Table 2) and the strength of their correlation was strong (0.75–0.85; Table 2) in Tunø. Indeed, the soil pore water chemistry, which is generally referred to as N leaching, is one of the most widely monitored parameters for scientific, monitoring, and regulatory purposes in order to quantify N losses from the agricultural system to the hydrogeological system [36,75–77]. Several methods have been developed, and the advantages and limitations of each method are well documented (e.g., [75,78,79]). Because of the spatial heterogeneity and temporal variability of soil pore water chemistry, establishing monitoring networks and obtaining representative values for N leaching will be costly and labor-intensive; however, nitrate in soil pore water collected below the root zone directly measures the amount of nitrate loss after the complex interplay between agricultural and biogeochemical N cycles in the soil layer. Furthermore, farmers or citizens can be part of the monitoring procedure; therefore, this may contribute to increasing the transparency of the indicator. We strongly recommend developing a sampling protocol to account for the spatial and temporal variability of the soil pore water chemistry that can document the link between N surplus and nitrate concentration in soil pore water.

On the other hand, water companies and authorities may be more interested in the changes in the quality of drinking water resources that likely integrate signals from the entire catchment or

recharging area. In order to do this, N surplus may be calculated for the area of interest, i.e., catchment or recharging area, and nitrate concentrations in oxic groundwater can be used as a water quality state indicator. To specifically evaluate the effects of the mitigation measures, oxic groundwater should be focused upon because the effects of naturally occurring N reduction reactions are negligible in oxic conditions. In addition, our results of all three case study sites showed that the lag times generally increased with an increasing distance from the N source (e.g., depth or flow pathways). Therefore, oxic groundwater close to the N source may be most effective for rapid communication with the stakeholders. It is equally important to select representative locations for oxic groundwater monitoring because the groundwater chemistry and lag time responses can be spatially heterogeneous. Therefore, monitoring programs should be carefully established to document the spatial and temporal variability of the site.

6. Conclusions

This study investigated lag times as a link indicator to better understand the cause–effect relations between agricultural N pressure and groundwater quality state using data from the three case study sites. We showed that the cross-correlation (CCF) analysis of soil surface N surplus and annual average concentrations of nitrate in water can be a simple and useful method to determine the lag times between agricultural N pressure and groundwater quality state if long-term pressure and state data are available. Furthermore, the spatial patterns of lag time distribution revealed the dominant pathways of water and nitrate, which then provide valuable information for the selection of mitigation measures. Groundwater age is another useful link indicator to estimate the timescale of the water quality state responses to the agricultural pressure, particularly in data-limited circumstances. However, lag time represents transit time while groundwater age measures residence time; thus, these two should be distinguished in communication with the stakeholders.

Altogether, we concluded that the link indicators investigated under the DPLSIR framework can illustrate some of the potential for enhancing the communication of uncertainties and complexity between the agricultural pressure and groundwater state. When dealing with groundwater and agriculture-related issues, the link between the pressure and state is important for the responses (in terms of measures and policies) adopted by authorities that are to be accepted and used by farmers. If there is a common understanding of the link among the stakeholders, then decisions and water protection plans might be easier to implement. Knowledge exchange on the link between decision-takers (farmers) and decision-makers (policymakers and water work) should be one of the first steps when developing water protection plans in the future.

Author Contributions: For research articles with several authors: conceptualization, H.K., A.H., N.S., and B.H.; methodology, H.K. and A.H.; validation, H.K., N.S., and A.H.; formal analysis, H.K., N.S., and A.H.; data curation, H.K., N.S., I.M., G.B.-M., and A.H.; writing—original draft preparation, H.K.; writing—review and editing, H.K., N.S., I.M., M.G., G.B.-M., T.D., and B.H.; visualization, H.K.; supervision, B.H.; funding acquisition, B.H. All authors have read and agreed to the published version of the manuscript.

Funding: This project has received funding from the European Union’s Horizon 2020 research and innovation program under grant agreement no. 727984.

Acknowledgments: We would like to thank the reviewers for the comments. This paper has been produced in the context of the project Fairway (farm system management and governance for producing good water quality for drinking water supplies; grant no. 727984). The authors thank “Eau de Paris” for providing ground state data of the La Voulzie catchment. The authors also thank Lærke Thorling, who took part in collecting the original Tunø data, for discussing the Tunø case study site.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. WHO. *WHO Guidelines for Drinking-Water Quality*; World Health Organization: Geneva, Switzerland, 2011; Volume 38.

2. Knobeloch, L.; Salna, B.; Hogan, A.; Postle, J.; Anderson, H. Blue babies and nitrate-contaminated well water. *Environ. Health Perspect.* **2000**, *108*, 675–678. [CrossRef] [PubMed]
3. Ward, M.; Jones, R.; Brender, J.; de Kok, T.; Weyer, P.; Nolan, B.; Villanueva, C.; van Breda, S. Drinking water nitrate and human health: An updated review. *Int. J. Environ. Res. Public Health* **2018**, *15*, 1557. [CrossRef] [PubMed]
4. Espejo-Herrera, N.; Gràcia-Lavedan, E.; Boldo, E.; Aragonés, N.; Pérez-Gómez, B.; Pollán, M.; Molina, A.J.; Fernández, T.; Martín, V.; La Vecchia, C.; et al. Colorectal cancer risk and nitrate exposure through drinking water and diet. *Int. J. Cancer* **2016**, *139*, 334–346. [CrossRef] [PubMed]
5. Schullehner, J.; Hansen, B.; Thygesen, M.; Pedersen, C.B.; Sigsgaard, T. Nitrate in drinking water and colorectal cancer risk: A nationwide population-based cohort study. *Int. J. Cancer* **2018**, *143*, 73–79. [CrossRef]
6. Temkin, A.; Evans, S.; Manidis, T.; Campbell, C.; Naidenko, O.V. Exposure-based assessment and economic valuation of adverse birth outcomes and cancer risk due to nitrate in United States drinking water. *Environ. Res.* **2019**, *176*, 108442. [CrossRef]
7. European Environmental Agency. Main Drinking Water Problems. Available online: <https://www.eea.europa.eu/data-and-maps/figures/main-drinking-water-problems> (accessed on 20 May 2020).
8. Glavan, M.; Železnikar, Š.; Velthof, G.; Boekhold, S.; Langaas, S.; Pintar, M. How to enhance the role of science in European Union policy making and implementation: The case of agricultural impacts on drinking water quality. *Water* **2019**, *11*, 492. [CrossRef]
9. European Commission. *Framework for Action for the Management of Small Drinking Water Supplies*; European Union: Brussel, Belgium, 2014.
10. European Commission *Synthesis Report on the Quality of Drinking Water in the EU Examining the Member States' Reports for the Period 2008–2010 under Directive 98/83/EC EN*; European Union: Brussel, Belgium, 2014.
11. OECD. OECD Principles on Water Governance. Available online: <https://www.oecd.org/governance/oecd-principles-on-water-governance.htm> (accessed on 20 May 2020).
12. Young, S.; Plummer, R.; FitzGibbon, J. What can we learn from exemplary groundwater protection programs? *Can. Water Resour. J.* **2009**, *34*, 61–78. [CrossRef]
13. De Loë, R.C.; Di Giantomasso, S.E.; Kreutzwiiser, R.D. Local capacity for groundwater protection in ontario. *Environ. Manag.* **2002**, *29*, 217–233. [CrossRef]
14. Ivey, J.L.; de Loë, R.; Kreutzwiiser, R.; Ferreyra, C. An institutional perspective on local capacity for source water protection. *Geoforum* **2006**, *37*, 944–957. [CrossRef]
15. Graversgaard, M.; Hedelin, B.; Smith, L.; Gertz, F.; Højberg, A.L.; Langford, J.; Martinez, G.; Mostert, E.; Ptak, E.; Peterson, H.; et al. Opportunities and barriers for water co-governance—A critical analysis of seven cases of diffuse water pollution from agriculture in Europe, Australia and North America. *Sustainability* **2018**, *10*, 1634. [CrossRef]
16. Serrat-Capdevila, A.; Valdes, J.; Gupta, H. Decision support systems in water resources planning and management: Stakeholder participation and the sustainable path to science-based decision making. In *Efficient Decision Support Systems—Practice and Challenges from Current to Future*; InTechOpen: London, UK, 2011; pp. 1–16.
17. Jacobs, K.; Lebel, L.; Buizer, J.; Addams, L.; Matson, P.; McCullough, E.; Garden, P.; Saliba, G.; Finan, T. Linking knowledge with action in the pursuit of sustainable water-resources management. *Proc. Natl. Acad. Sci. USA* **2016**, *113*, 4591–4596. [CrossRef] [PubMed]
18. Van Meter, K.J.; Basu, N.B. Time lags in watershed-scale nutrient transport: An exploration of dominant controls. *Environ. Res. Lett.* **2017**, *12*, 084017. [CrossRef]
19. Meals, D.W.; Dressing, S.A.; Davenport, T.E. Lag time in water quality response to best management practices: A review. *J. Environ. Qual.* **2010**, *39*, 85–96. [CrossRef]
20. European Environment Agency (EEA). EEA Glossary. Available online: <https://www.eea.europa.eu/help/glossary/eea-glossary/dpsir> (accessed on 1 May 2020).
21. Bagordo, F.; Migoni, D.; Grassi, T.; Serio, F.; Idolo, A.; Guido, M.; Zaccarelli, N.; Fanizzi, F.P.; De Donno, A. Using the DPSIR framework to identify factors influencing the quality of groundwater in Grecia Salentina (Puglia, Italy). *Rend. Lincei* **2016**, *27*, 113–125. [CrossRef]
22. Mattas, C.; Voudouris, K.; Panagopoulos, A. Integrated groundwater resources management using the DPSIR approach in a GIS environment context: A case study from the Gallikos river basin, North Greece. *Water* **2014**, *6*, 1043–1068. [CrossRef]

23. Song, X.; Frostell, B. The DPSIR framework and a pressure-oriented water quality monitoring approach to ecological river restoration. *Water* **2012**, *4*, 670–682. [CrossRef]
24. Rekolainen, S.; Kämäri, J.; Hiltunen, M.; Saloranta, T.M. A conceptual framework for identifying the need and role of models in the implementation of the water framework directive. *Int. J. River Basin Manag.* **2003**, *1*, 347–352. [CrossRef]
25. Carr, E.R.; Wingard, P.M.; Yorty, S.C.; Thompson, M.C.; Jensen, N.K.; Roberson, J. Applying DPSIR to sustainable development. *Int. J. Sustain. Dev. World Ecol.* **2007**, *14*, 543–555. [CrossRef]
26. Smeets, E.; Weterings, R. *Environmental Indicators: Typology and Overview*; Technical Report No. 25; European Environment Agency: Copenhagen, Denmark, 1999.
27. Gabrielsen, P.; Bosch, P. *Environmental Indicators: Typology and Use in Reporting*; European Environment Agency: Copenhagen, Denmark, 2003.
28. Koh, E.-H.; Lee, E.; Kaown, D.; Green, C.T.; Koh, D.-C.; Lee, K.-K.; Lee, S.H. Comparison of groundwater age models for assessing nitrate loading, transport pathways, and management options in a complex aquifer system. *Hydrol. Process.* **2018**, *32*, 923–938. [CrossRef]
29. Beven, K.; Germann, P. Macropores and water flow in soils. *Water Resour. Res.* **1982**, *18*, 1311–1325. [CrossRef]
30. Hendrickx, J.M.H.; Flury, M. Uniform and preferential flow mechanisms in the vadose zone. In *Conceptual Models of Flow and Transport in the Fractured Vadose Zone*; National Academies Press: Washington, DC, USA, 2001; pp. 149–187. ISBN 978-0-309-07302-8.
31. Rosenbom, A.E.; Therrien, R.; Refsgaard, J.C.; Jensen, K.H.; Ernstsens, V.; Klint, K.E.S. Numerical analysis of water and solute transport in variably-saturated fractured clayey till. *J. Contam. Hydrol.* **2009**, *104*, 137–152. [CrossRef] [PubMed]
32. Rosenbom, A.E.; Ernstsens, V.; Flühler, H.; Jensen, K.H.; Refsgaard, J.C.; Wydler, H. Fluorescence imaging applied to tracer distributions in variably saturated fractured clayey till. *J. Environ. Qual.* **2008**, *37*, 448–458. [CrossRef] [PubMed]
33. Hansen, B.; Thorling, L.; Kim, H.; Blicher-Mathiesen, G. Long-term nitrate response in shallow groundwater to agricultural N regulations in Denmark. *J. Environ. Manag.* **2019**, *240*, 66–74. [CrossRef] [PubMed]
34. Parris, K. Agricultural nutrient balances as agri-environmental indicators: An OECD perspective. *Environ. Pollut.* **1998**, *102*, 219–225. [CrossRef]
35. Organisation for Economic Cooperation and Development. *Environmental Indicators for Agriculture. Methods and Results*; OECD Publishing: Paris, France, 2001; ISBN 9789264186149.
36. Blicher-Mathiesen, G.; Andersen, H.E.; Larsen, S.E. Nitrogen field balances and suction cup-measured N leaching in Danish catchments. *Agric. Ecosyst. Environ.* **2014**, *196*, 69–75. [CrossRef]
37. De Notaris, C.; Rasmussen, J.; Sørensen, P.; Olesen, J.E. Nitrogen leaching: A crop rotation perspective on the effect of N surplus, field management and use of catch crops. *Agric. Ecosyst. Environ.* **2018**, *255*, 1–11. [CrossRef]
38. Wick, K.; Heumesser, C.; Schmid, E. Groundwater nitrate contamination: Factors and indicators. *J. Environ. Manag.* **2012**, *111*, 178–186. [CrossRef]
39. Hansen, B.; Thorling, L.; Schullehner, J.; Termansen, M.; Dalgaard, T. Groundwater nitrate response to sustainable nitrogen management. *Sci. Rep.* **2017**, *7*, 8566. [CrossRef]
40. Klages, S.; Heidecke, C.; Osterburg, B.; Bailey, J.; Calciu, I.; Casey, C.; Dalgaard, T.; Frick, H.; Glavan, M.; D’Haene, K.; et al. Nitrogen surplus—A unified indicator for water pollution in Europe? *Water* **2020**, *12*, 1197. [CrossRef]
41. Sebol, L.A.; Robertson, W.D.; Busenberg, E.; Plummer, L.N.; Ryan, M.C.; Schiff, S.L. Evidence of CFC degradation in groundwater under pyrite-oxidizing conditions. *J. Hydrol.* **2007**, *347*, 1–12. [CrossRef]
42. Hinsby, K.; Højberg, A.L.; Engesgaard, P.; Jensen, K.H.; Larsen, F.; Plummer, L.N.; Busenberg, E. Transport and degradation of chlorofluorocarbons (CFCs) in the pyritic Rabis Creek aquifer, Denmark. *Water Resour. Res.* **2007**, *43*, W10423. [CrossRef]
43. Ellermann, T.; Bossi, R.; Nygaard, J.; Christensen, J.; Løfstrøm, P.; Monies, C.; Grundahl, L.; Geels, C.; Nielsen, I.E.; Poulsen, M.B. *Atmosfærisk Deposition 2017*; Videnskabelig Rapport Fra DCE—Nationalt Center for Miljø og Energi nr. 304; Aarhus Universitet: Aarhus, Denmark, 2019.
44. Ministry of Environment and Food, Danish Agricultural Agency. Available online: <https://lbst.dk/landbrug/kort-og-markblokke/hvordan-faar-du-adgang-til-data/> (accessed on 1 May 2020).
45. Aarhus Amt. *Vandforsyning På Tunø*; Teknisk Rapport; Aarhus Amt: Højbjerg, Denmark, 1989; p. 87.

46. Jensen, J.C.S.; Thirup, C. *Nitratudvaskning i indsatsområde Tunø*; Report; Aarhus Amt: Højbjerg, Denmark, 2006; p. 31.
47. Geological Survey of Denmark and Greenland (GEUS). Jupiter. Available online: <https://www.geus.dk/> (accessed on 1 May 2020).
48. Thorling, L.; Thomsen, R. *Tunø Status Report 1989–1999*; Aarhus Amt: Højbjerg, Denmark, 2001.
49. Windolf, J.; Blicher-Mathiesen, G.; Carstensen, J.; Kronvang, B. Changes in nitrogen loads to estuaries following implementation of governmental action plans in Denmark: A paired catchment and estuary approach for analysing regional responses. *Environ. Sci. Policy* **2012**, *24*, 24–33. [[CrossRef](#)]
50. Hansen, B.; Dalgaard, T.; Thorling, L.; Sørensen, B.; Erlandsen, M. Regional analysis of groundwater nitrate concentrations and trends in Denmark in regard to agricultural influence. *Biogeosciences* **2012**, *9*, 3277–3286. [[CrossRef](#)]
51. Thorling, L.; Ditlefsen, C.; Ernstsens, V.; Hansen, B.; Johnsen, A.R.; Troldborg, L. *Grundvandsovervågning Status Og Udvikling 1989–2018*; Teknisk Rapport, GEUS 2019; GEUS: Copenhagen, Denmark, 2019.
52. Poisvert, C.; Curie, F.; Moatar, F. Annual agricultural N surplus in France over a 70-year period. *Nutr. Cycl. Agroecosyst.* **2017**, *107*, 63–78. [[CrossRef](#)]
53. Poisvert, C.; Curie, F.; Gassama, N. *Evolution des Surplus Azotés (1960–2010): Déploiement National, Étude des Temps de Transfert et de L'impact du Changement des Pratiques Agricoles*; Université de Tours—UFR Sciences et Techniques: Tours, France, 2016; p. 45.
54. McGonigle, D.F.; Harris, R.C.; McCamphill, C.; Kirk, S.; Dils, R.; MacDonald, J.; Bailey, S. Towards a more strategic approach to research to support catchment-based policy approaches to mitigate agricultural water pollution: A UK case-study. *Environ. Sci. Policy* **2012**, *24*, 4–14. [[CrossRef](#)]
55. Cherry, K.A.; Shepherd, M.; Withers, P.J.A.; Mooney, S.J. Assessing the effectiveness of actions to mitigate nutrient loss from agriculture: A review of methods. *Sci. Total Environ.* **2008**, *406*, 1–23. [[CrossRef](#)]
56. Bouraoui, F.; Grizzetti, B. Modelling mitigation options to reduce diffuse nitrogen water pollution from agriculture. *Sci. Total Environ.* **2014**, *468–469*, 1267–1277. [[CrossRef](#)]
57. Vero, S.E.; Healy, M.G.; Henry, T.; Creamer, R.E.; Ibrahim, T.G.; Richards, K.G.; Mellander, P.E.; McDonald, N.T.; Fenton, O. A framework for determining unsaturated zone water quality time lags at catchment scale. *Agric. Ecosyst. Environ.* **2017**, *236*, 234–242. [[CrossRef](#)]
58. Bourgeois, C.; Jayet, P.-A. Regulation of relationships between heterogeneous farmers and an aquifer accounting for lag effects. *Aust. J. Agric. Resour. Econ.* **2016**, *60*, 39–59. [[CrossRef](#)]
59. Vervloet, L.S.C.; Binning, P.J.; Børgesen, C.D.; Højberg, A.L. Delay in catchment nitrogen load to streams following restrictions on fertilizer application. *Sci. Total Environ.* **2018**, *627*, 1154–1166. [[CrossRef](#)]
60. Odgaard, B.V.; Rømer, J.R. *Danske Landbrugslandskaber Gennem 2000 år: Fra Digevoldninger Til Støtteordninger*; Odgaard, B.V., Ed.; Aarhus University Press: Aarhus, Denmark, 2000; ISBN 978-87-7934-420-4.
61. Carter, A. How pesticides get into water—And proposed reduction measures. *Pestic. Outlook* **2000**, *11*, 149–156. [[CrossRef](#)]
62. Ghasemizadeh, R.; Hellweger, F.; Butscher, C.; Padilla, I.; Vesper, D.; Field, M.; Alshawabkeh, A. Review: Groundwater flow and transport modeling of karst aquifers, with particular reference to the North Coast Limestone aquifer system of Puerto Rico. *Hydrogeol. J.* **2012**, *20*, 1441–1461. [[CrossRef](#)] [[PubMed](#)]
63. Megnien, C. Transits multiples dans l'aquifère des sources de Provins (Ile-de-France) et stratification des écoulements souterrains; Multiple transits in the aquifer supplying the Provins springs (Ile-de-France) and stratified groundwater flow (en). *Hydrogéologie (Orléans)* **1998**, *4*, 63–71.
64. Gourcy, L.; Baran, N.; Vittecoq, B. Improving the knowledge of pesticide and nitrate transfer processes using age-dating tools (CFC, SF6, 3H) in a volcanic island (Martinique, French West Indies). *J. Contam. Hydrol.* **2009**, *108*, 107–117. [[CrossRef](#)] [[PubMed](#)]
65. Hansen, B.; Thorling, L.; Dalgaard, T.; Erlandsen, M. Trend reversal of nitrate in Danish groundwater—A reflection of agricultural practices and nitrogen surpluses since 1950. *Environ. Sci. Technol.* **2011**, *45*, 228–234. [[CrossRef](#)]
66. Böhlke, J.K.; Michel, R.L. Contrasting residence times and fluxes of water and sulfate in two small forested watersheds in Virginia, USA. *Sci. Total Environ.* **2009**, *407*, 4363–4377. [[CrossRef](#)]
67. Wells, M.; Gilmore, T.; Mittelstet, A.; Snow, D.; Sibray, S. Assessing decadal trends of a nitrate-contaminated shallow aquifer in Western Nebraska using groundwater isotopes, age-dating, and monitoring. *Water* **2018**, *10*, 1047. [[CrossRef](#)]


68. Böhlke, J.K.; Denver, J.M. Combined use of groundwater dating, chemical, and isotopic analyses to resolve the history and fate of nitrate contamination in two agricultural watersheds, Atlantic Coastal Plain, Maryland. *Water Resour. Res.* **1995**, *31*, 2319–2339. [[CrossRef](#)]
69. Manga, M. On the timescales characterizing groundwater discharge at springs. *J. Hydrol.* **1999**, *219*, 56–69. [[CrossRef](#)]
70. McGuire, K.J.; McDonnell, J.J. A review and evaluation of catchment transit time modeling. *J. Hydrol.* **2006**, *330*, 543–563. [[CrossRef](#)]
71. Hamilton, S.K. Biogeochemical time lags may delay responses of streams to ecological restoration. *Freshw. Biol.* **2012**, *57*, 43–57. [[CrossRef](#)]
72. Jakobsen, R.; Hinsby, K.; Aamand, J.; van der Keur, P.; Kidmose, J.; Purtschert, R.; Jurgens, B.; Sültenfuss, J.; Albers, C.N. History and sources of co-occurring pesticides in an abstraction well unraveled by age distributions of depth-specific groundwater samples. *Environ. Sci. Technol.* **2020**, *54*, 158–165. [[CrossRef](#)] [[PubMed](#)]
73. Weissmann, G.S.; Zhang, Y.; LaBolle, E.M.; Fogg, G.E. Dispersion of groundwater age in an alluvial aquifer system. *Water Resour. Res.* **2002**, *38*, 1198. [[CrossRef](#)]
74. Botter, G.; Bertuzzo, E.; Rinaldo, A. Catchment residence and travel time distributions: The master equation. *Geophys. Res. Lett.* **2011**, *38*, 1–6. [[CrossRef](#)]
75. U.S. Environmental Protection Agency Pore Water Sampling. 2013, 1–16. Available online: <https://www.epa.gov/quality/pore-water-sampling> (accessed on 1 May 2020).
76. Yeshno, E.; Arnon, S.; Dahan, O. Real-time monitoring of nitrate in soils as a key for optimization of agricultural productivity and prevention of groundwater pollution. *Hydrol. Earth Syst. Sci.* **2019**, *23*, 3997–4010. [[CrossRef](#)]
77. Velthof, G.L.; Hoving, I.E.; Doling, J.; Smit, A.; Kuikman, P.J.; Oenema, O. Method and timing of grassland renovation affects herbage yield, nitrate leaching, and nitrous oxide emission in intensively managed grasslands. *Nutr. Cycl. Agroecosyst.* **2010**, *86*, 401–412. [[CrossRef](#)]
78. Singh, G.; Kaur, G.; Williard, K.; Schoonover, J.; Kang, J. Monitoring of water and solute transport in the vadose zone: A review. *Vadose Zone J.* **2018**, *17*, 160058. [[CrossRef](#)]
79. Weihermüller, L.; Siemens, J.; Deurer, M.; Knoblauch, S.; Rupp, H.; Göttlein, A.; Pütz, T. In situ soil water extraction: A review. *J. Environ. Qual.* **2007**, *36*, 1735–1748. [[CrossRef](#)]



© 2020 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).

APPENDIX B: LEAFLET

Take home messages

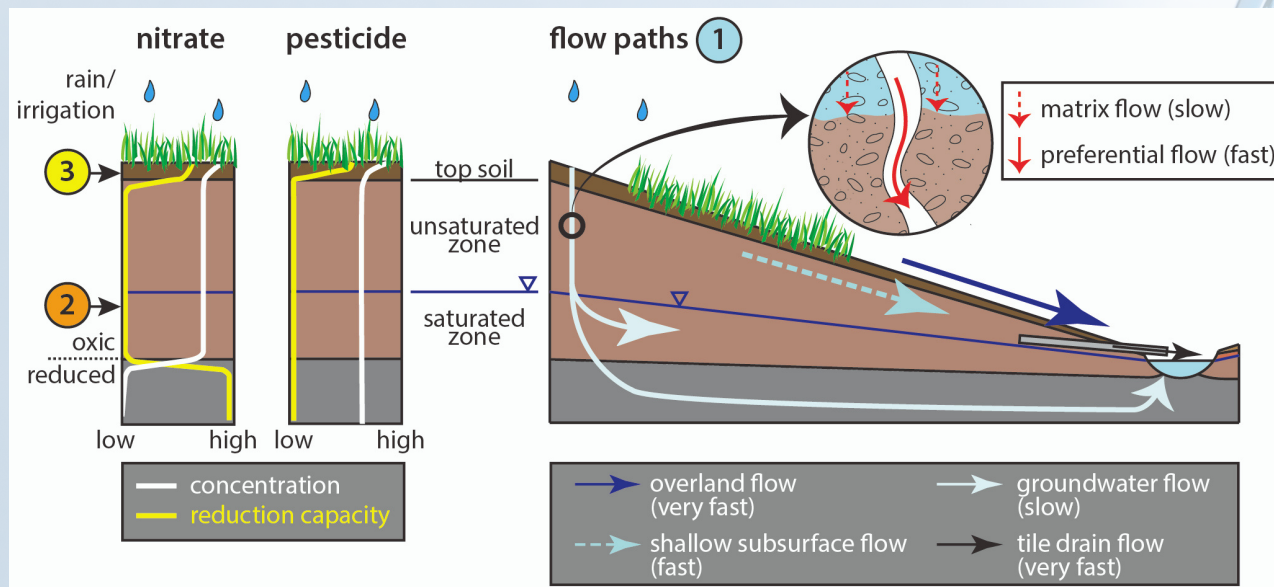

Linking agricultural impact and drinking water quality response

Examples of drinking water protection in Denmark and France

Q: How long does it take before we can see an effect of measures for drinking water protection?

A: That depends on the local hydrogeological conditions and flow paths which might vary from several years for shallow groundwater to several decades for deeper groundwater. (1)

Q: How should a monitoring program be designed?

A: The monitoring period should vary depending on the lag time from root zone leaching to drinking water abstraction points (1). For example, the shorter lag time, the higher sampling frequency.

Q: How do we measure the effects of the mitigation measures at the catchment scale?

A: By measuring nitrate concentrations in oxic groundwater, and pesticides concentrations in the saturated zone. (2)

Q: How can the short-term effects of mitigation measures be evaluated?

A: By direct measurements of nitrate or pesticide leaching below root zone. (3)



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 727984

www.fairway-project.eu

Coordinator Contact

Gerard Velthof

Wageningen Research

fairway@wur.nl



Fairway Project



@FairwayEU



Fairway Project Channel

BACKGROUND

Safe drinking water is vital for human health and economy.

Throughout the EU, diffuse pollution of nitrogen and pesticides from agriculture is one of the main obstacles to meeting the drinking water quality targets.

Policies to protect drinking water resources are not achieving a consistent level of implementation and effectiveness across all member states.

Better understanding of the relationships between the mitigation measures and drinking water quality is necessary to meet the drinking water quality targets.

CASE STUDIES

Implementation of drinking water protections has been analyzed in 3 study areas: two in Denmark and one in France.

The three study areas represent important drinking abstraction areas with intensive farming.

The study sites vary regarding climate, abstraction volume, size of protected area, farming type, geology and flow pathways.

MAIN FINDINGS

The time lag between agricultural impact and drinking water quality response is an important indicator to be used in a successful drinking water protection strategy.

The time lag indicator is important in both regarding communication of results to stakeholders and design of monitoring programs.

